
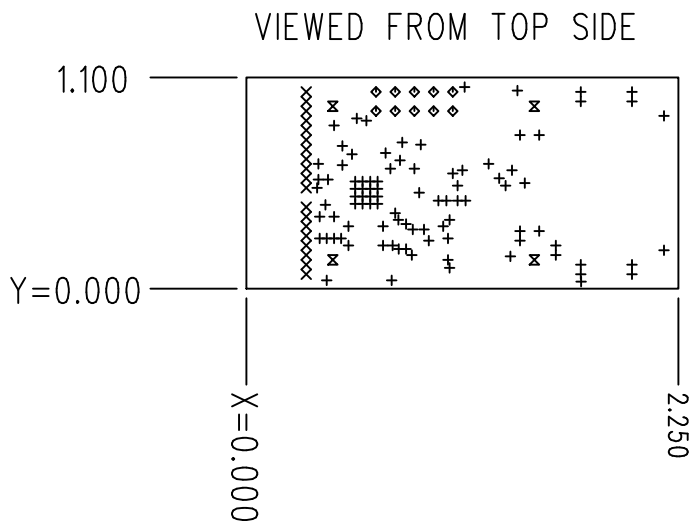


PDF

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1 MATERIAL: EPOXY GLASS LAMINATE (FR4), GREEN, COPPER 1 OZ. ALL LAYERS, MUST MEET UL FLAMMABILITY REQUIREMENTS 94V-0.
- 2 COPPER FOIL THICKNESS AFTER THRU HOLE SHALL BE 0.0028 MIN. ON BOTH SIDES OF BOARD. THRU HOLE WALL THICKNESS TO BE 0.0014 MIN
- 3 APPLY SOLDER MASK TO BOTH SIDES OF BOARD USING L.P.I. OVER BARE COPPER, COLOR "RED"
- 4 APPLY SILKSCREEN, VENDORS UL NO. AND DATE CODE USING HIGH TEMPERATURE EPOXY INK, COLOR "WHITE" ON TOP SIDE OF BOARD.
- 5 ALL HOLES ARE PLATED THRU UNLESS SPECIFIED.
- 6 FABRICATE BOARD USING ARTWORK NO. FRB-01 / WTD-01 REV B
- 7 MAXIMUM ALLOWABLE BOARD WARPAGE = 0.012 INCH IN BOW.
- 8 OVERALL THICKNESS BEFORE SOLDERMASK TO BE .062 +/- .003
- 9 GOLD FLASH .000003 OVER .0002 NICKEL. AFTER SOLDERMASK APPLICATION
- 10 BOARD MUST BE RoHS COMPLIANT.

DO NOT SCALE DWG ALL DIMS IN INCHES TOLERANCES .X +/- .030 .XX +/- .010 .XXX +/- .003 ANGLES +/- .5 DEG. UNLESS OTHERWISE SPECIFIED	TENACORE		
	FABRICATION DWG. FireBrand / WatchDog		
	DWG SIZE A	DWG NO. FRB-01 / WTD-01	REV B
	SCALE: 1 : 1	SHEET: 1 OF 3	

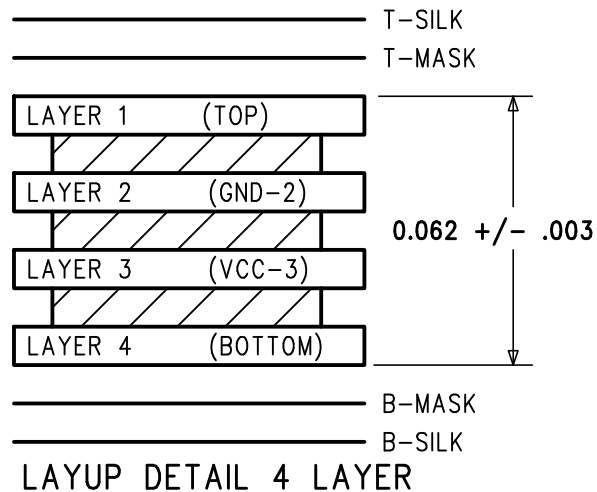

SIZE	QTY	SYM	PLATED	TOL
10	94	+	YES	+/-3.0
13	19	×	YES	+/-3.0
39	10	◇	YES	+/-3.0
100	4	⊗	YES	+/-3.0

DO NOT SCALE DWG ALL DIMS IN INCHES TOLERANCES .X +/- .030 .XX +/- .010 .XXX +/- .003 ANGLES +/- .5 DEG. UNLESS OTHERWISE SPECIFIED	TENACORE		
	FABRICATION DWG. FireBrand / WatchDog		
	DWG SIZE A	DWG NO. FRB-01 / WTD-01	REV B
	SCALE: 1 : 1	SHEET: 2	OF 3