
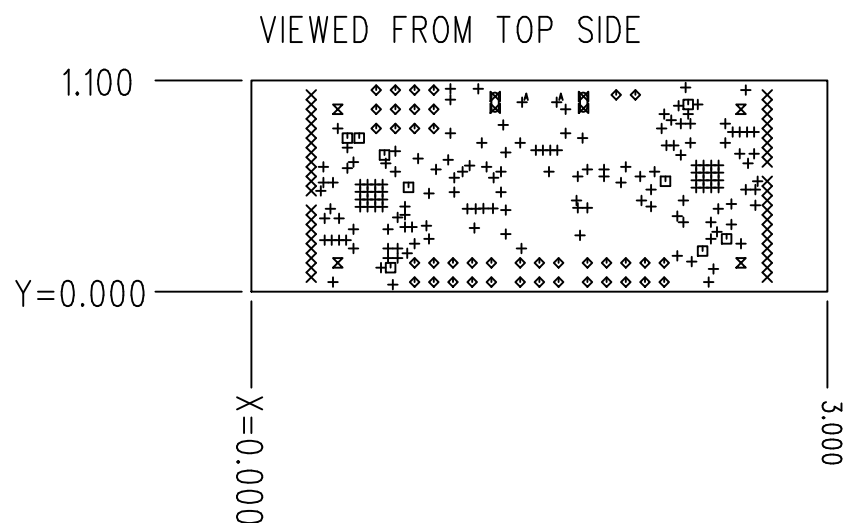


PDF

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1 MATERIAL: EPOXY GLASS LAMINATE (FR4), GREEN, COPPER 1 OZ. ALL LAYERS, MUST MEET UL FLAMMABILITY REQUIREMENTS 94V-0.
- 2 COPPER FOIL THICKNESS AFTER THRU HOLE SHALL BE 0.0021 MIN. ON BOTH SIDES OF BOARD. THRU HOLE WALL THICKNESS TO BE 0.0007 MIN
- 3 APPLY SOLDER MASK TO BOTH SIDES OF BOARD USING L.P.I. OVER BARE COPPER, COLOR "RED"
- 4 APPLY SILKSCREEN, VENDORS UL NO. AND DATE CODE USING HIGH TEMPERATURE EPOXY INK, COLOR "WHITE" ON TOP SIDE OF BOARD.
- 5 ALL HOLES ARE PLATED THRU UNLESS SPECIFIED.
- 6 FABRICATE BOARD USING ARTWORK NO. TENA004 REV A
- 7 MAXIMUM ALLOWABLE BOARD WARPAGE = 0.012 INCH IN BOW.
- 8 OVERALL THICKNESS BEFORE SOLDERMASK TO BE .062 +/- .003
- 9 GOLD FLASH .000003 OVER .0002 NICKEL. AFTER SOLDERMASK APPLICATION
- 10 BOARD MUST BE RoHS COMPLIANT.
- 11 STEP & REPEAT ARTWORK 1.700 x5 FOR A PANEL OF 6.

DO NOT SCALE DWG ALL DIMS IN INCHES TOLERANCES .X +/- .030 .XX +/- .010 .XXX +/- .003 ANGLES +/- .5 DEG. UNLESS OTHERWISE SPECIFIED	<b>TENACORE</b>		
	FABRICATION DWG.		
	<b>DUAL CONTROLLER</b>		
	DWG SIZE A	DWG NO. TENA004	REV A
	SCALE: 1 : 1	SHEET: 1 OF 3	

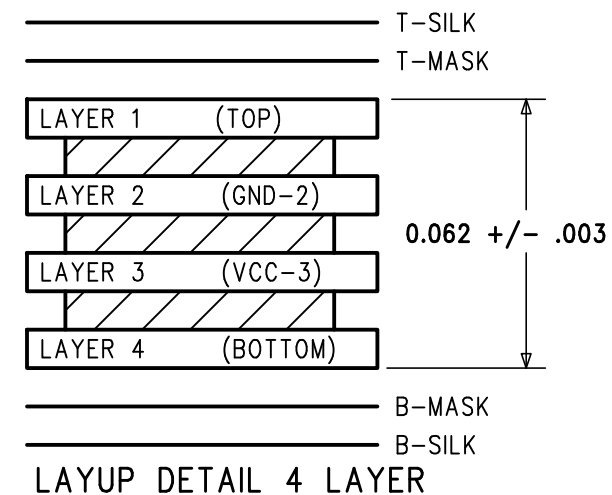

SIZE	QTY	SYM	PLATED	TOL
10	161	+	YES	+/-3.0
13	38	×	YES	+/-3.0
20	9	□	YES	+/-3.0
39	40	◇	YES	+/-3.0
100	4	⊗	YES	+/-3.0
39 x 100	2	⊗	YES	+/-3.0
43	2	⊕ <sup>A</sup>	NO	+/-3.0

DO NOT SCALE DWG  
 ALL DIMS IN INCHES  
 TOLERANCES  
 .X +/- .030  
 .XX +/- .010  
 .XXX +/- .003  
 ANGLES +/- .5 DEG.  
 UNLESS OTHERWISE SPECIFIED

**TENACORE**

FABRICATION DWG.  
**DUAL CONTROLLER**

DWG SIZE	DWG NO. TENA004	REV A
A		
SCALE: 1 : 1	SHEET: 2	OF 3