


PDF

NOTES: UNLESS OTHERWISE SPECIFIED.


- 1 MATERIAL: EPOXY GLASS LAMINATE (FR4), GREEN, COPPER 1 OZ. ALL LAYERS, MUST MEET UL FLAMMABILITY REQUIREMENTS 94V-0.
- 2 COPPER FOIL THICKNESS AFTER THRU HOLE SHALL BE 0.0021 MIN. ON BOTH SIDES OF BOARD. THRU HOLE WALL THICKNESS TO BE 0.0007 MIN
- 3 APPLY SOLDER MASK TO BOTH SIDES OF BOARD USING L.P.I. OVER BARE COPPER, COLOR "WHITE"
- 4 APPLY SILKSCREEN, USING L.P.I. COLOR "BLACK" TO BOTH SIDES OF THE BOARD.
- 5 APPLY VENDORS UL NO. AND DATE CODE IN SILKSCREEN TO BOTTOM SIDE.
- 6 FABRICATE BOARD USING ARTWORK NO. TENA006 REV A
- 7 MAXIMUM ALLOWABLE BOARD WARPAGE = 0.012 INCH IN BOW.
- 8 OVERALL THICKNESS BEFORE SOLDERMASK TO BE .062 +/- .003
- 9 GOLD FLASH .000003 OVER .0002 NICKEL. AFTER SOLDERMASK APPLICATION
- 10 BOARD MUST BE RoHS COMPLIANT.

DO NOT SCALE DWG ALL DIMS IN INCHES TOLERANCES .X +/- .030 .XX +/- .010 .XXX +/- .003 ANGLES +/- .5 DEG. UNLESS OTHERWISE SPECIFIED	TENACORE		
	FABRICATION DWG. Smart Tag		
	DWG SIZE	DWG NO. TENA006	REV A
	SCALE: 1 : 1	SHEET: 1 OF 3	

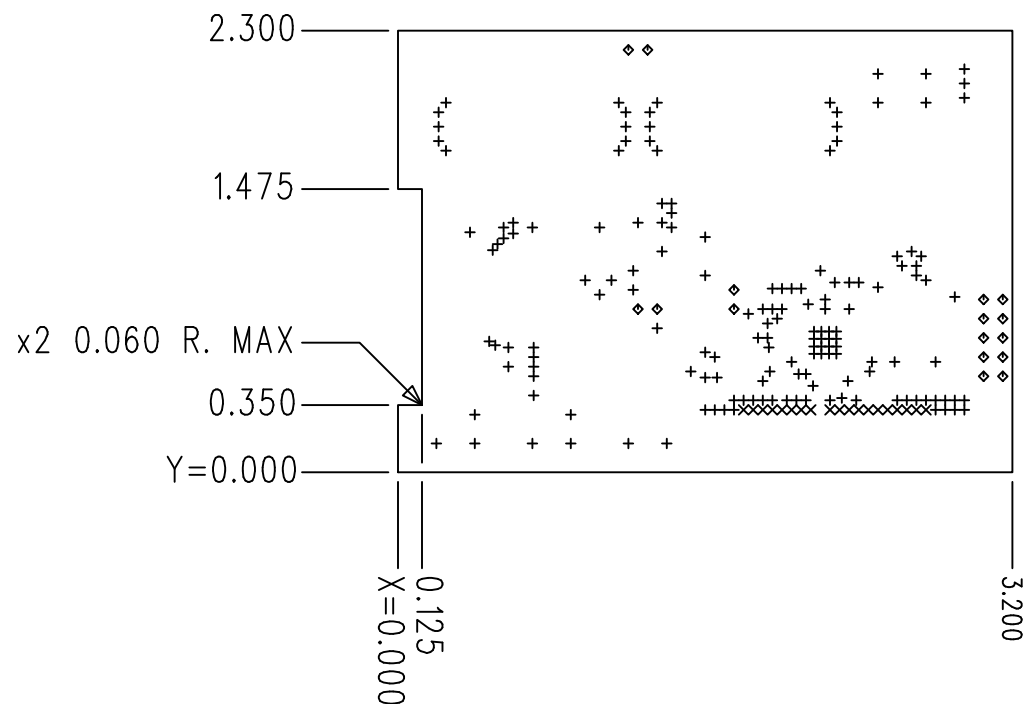

VIEWED FROM TOP SIDE

SIZE	QTY	SYM	PLATED	TOL
10	157	+	YES	+/-3.0
13	19	X	YES	+/-3.0
39	16	◇	YES	+/-3.0

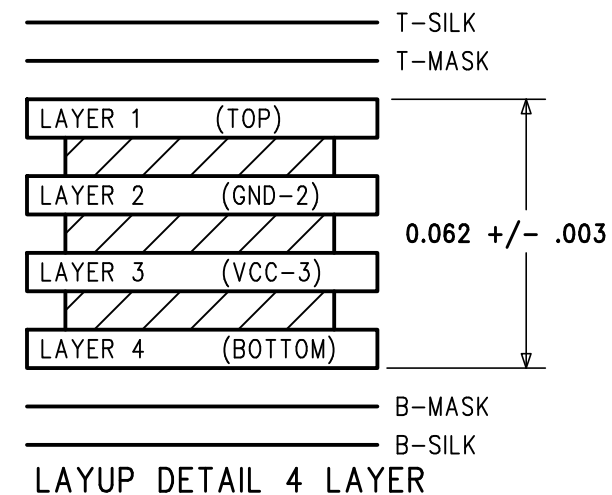

DO NOT SCALE DWG

ALL DIMS IN INCHES

TOLERANCES

.X +/- .030

.XX +/- .010

.XXX +/- .003

ANGLES +/- .5 DEG.

UNLESS OTHERWISE SPECIFIED

TENACORE

FABRICATION DWG.

Smart Tag

DWG SIZE	A	DWG NO. TENA006	REV A
SCALE: 1 : 1		SHEET: 2	OF 3