

The Sorted Pulse Data Software Library.

Pete Bunting

Documentation and Examples of using SPDLib.


April 28, 2013

Aberystwyth University



Copyright © Pete Bunting 2013.

This work is licensed under the Creative Commons Attribution-ShareAlike 3.0 Unported License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/3.0/>.

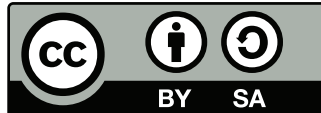

Acknowledgements

Authors

Peter Bunting

Dr Pete Bunting joined the Institute of Geography and Earth Sciences (IGES), Aberystwyth University, in September 2004 for his Ph.D. where upon completion in the summer of 2007 he received a lectureship in remote sensing and GIS. Prior to joining the department, Peter received a BEng(Hons) in software engineering from the department of Computer Science at Aberystwyth University. Pete also spent a year working for Landcare Research in New Zealand before rejoining IGES in 2012 as a senior lecturer in remote sensing.

Contact Details

Email: pfb@aber.ac.uk

Senior Lecturer in Remote Sensing
Institute of Geography and Earth Sciences
Aberystwyth University
Aberystwyth
Ceredigion
SY23 3DB
United Kingdom

Table of Contents

I	Background	1
1	Introduction	3
1.1	SPDLib Version	3
1.2	The KEA Image File Format	3
2	Installing SPDLib	5
2.1	Compiling SPDLib	5
2.2	Pre-requisites	6
2.3	Installing Pre-requisites From Source	8
2.4	Using the Ubuntu Package Manager	8
3	The SPDLib File Format	9
II	Command Line Tools	11
4	Data Management Commands	13
4.1	Convert File Formats – spdtranslate	13
4.1.1	Memory Requirements	14
4.1.2	Supported File Formats	16

4.1.3	Examples	19
4.1.4	Help File	22
4.2	Subset Data – spdssubset	25
4.2.1	Subset to shapefile	25
4.2.2	Subset to bounding box	25
4.2.3	Subset to bounding volume	26
4.2.4	Subset to bounding volume - using height above ground . . .	26
4.2.5	Subset to minimum Y	26
4.2.6	Subset to maximum Z	26
4.2.7	Help File	26
4.3	Merging Data Files – spdmerge	29
4.3.1	Help File	29
4.4	Extract Data – spdextract	31
4.4.1	Help File	31
4.5	Copying Data – spdcopy	32
4.5.1	Help File	32
4.6	Overlap – spdoverlap	33
4.6.1	Help File	33
4.7	Registration – spdwrap	34
4.7.1	Help File	34
4.8	Tiling Data	36
4.8.1	Defining Tiles – spddeftiles	36
4.8.2	Performing Tiling – spdtiling	38
4.8.3	Mosaicing Results – spdtileimg	40
5	Utility Commands	43

5.1	SPDLib Version – spdversion	43
5.1.1	Help File	43
5.2	File Summary – spdinfo	44
5.2.1	Help File	44
5.3	Find WKT Projections – spdproj	45
5.3.1	Help File	45
5.4	Errors with LAS files – spdlastest	46
5.4.1	Help File	46
5.5	Clear all classifications – spdclearclass	47
5.5.1	Help File	47
5.6	Define RGB Values – spddefrgb	48
5.6.1	Help File	48
5.7	Generate an image mask – spdmaskgen	50
5.7.1	Help File	50
5.8	Generate Statistics – spdstats	52
5.8.1	Help File	52
5.9	Thin the point cloud – spdthin	53
5.9.1	Help File	53
6	Data Processing Tools	55
6.1	Decompose Waveforms – spddecomp	55
6.1.1	Help File	55
6.2	Define Height Fields – spddefheight	57
6.2.1	Without Interpolation, using DTM	57
6.2.2	Interpolation Mode	57
6.2.3	Help File	58

6.3	Shift Elevation (Datum) – spdelevation	60
6.3.1	Help File	60
6.4	Interpolate Raster Surfaces – spdinterp	62
6.4.1	Help File	62
6.5	Classify Ground Returns	65
6.5.1	Progressive Morphology Filter – spdpmfgrd	65
6.5.2	Multi-Curvature Classifier – spdmccgrd	69
6.5.3	Parameter Free Filter – spdppfgrd	72
6.5.4	Polynomial Ground Filter – spdpolygrd	74
6.6	Calculate Point Cloud Metrics – spdmetrics	75
6.6.1	Help File	75
6.7	Generate Vertical Profiles – spdprofile	77
6.7.1	Help File	77
6.8	Remove Noise – spdrmnoise	79
6.8.1	Help File	79
7	Other Useful Scripts	81
7.1	Generate Batch Processing Script – spdbatchgen.py	81
7.2	Populate a template with multiple files – spdcmdgen.py	81
7.3	Build a merge command – spdbuildmergecmd.py	81
7.4	Build extract tiles commands – spdbuildtileextractcmd.py	81
III	Tutorials	83
8	Basic Processing	85
8.1	Convert to SPD	85

<i>TABLE OF CONTENTS</i>	xi
8.2 Classifying Ground Returns	85
9 Large Scale Processing	87
9.1 Tiling Workflow	87
9.1.1 Step 1: Convert LAS files to SPD (Unindexed UPD)	87
9.1.2 Step 2: Define Individual Tiles	92
9.1.3 Step 4: Extract Individual Tiles	95
9.1.4 Step 4: Generate a Clump Image	96
9.1.5 Step 5: Process Each Tile	97
9.1.6 Step 6: Check Outputs are Consitant	99
9.1.7 Step 7: Mosaic Image Outputs	100
IV Development	101

List of Figures

- 4.1 spdtranslate tiling. 14
- 4.2 An example of a terrestrial laser scanning scene indexed using spherical coordinate system; the overview image from the SPD Points Viewer. 21
- 4.3 An example of a terrestrial laser scanning scene indexed into a hemisphere; the image shown is the mean intensity as generated using spdmetrics. 21

List of Tables

Part I

Background

Chapter 1

Introduction

1.1 SPDLib Version

These notes were created with the following version of SPDLib:

```
spdversion SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
This program comes with ABSOLUTELY NO WARRANTY. This is free software,
and you are welcome to redistribute it under certain conditions; See
website (http://www.spdlib.org). Bugs are to be reported on the trac
or directly to spdlib-develop@lists.sourceforge.net
Mercurial Version: 152
SPD IO Library Version: 3.0.0
SPD Library Version: 3.0.0
spdversion - end
```

1.2 The KEA Image File Format

Chapter 2

Installing SPDLib

2.1 Compiling SPDLib

If libraries are not installed within /usr/local then the path needs to be specified using the variables available on CMake listed below.

```
cmake -D CMAKE_INSTALL_PREFIX=/usr/local \  
-D HDF5_INCLUDE_DIR=/usr/local/include \  
-D HDF5_LIB_PATH=/usr/local/lib \  
-D LIBLAS_INCLUDE_DIR=/usr/local/include \  
-D LIBLAS_LIB_PATH=/usr/local/lib \  
-D GSL_INCLUDE_DIR=/usr/local/include \  
-D GSL_LIB_PATH=/usr/local/lib \  
-D CGAL_INCLUDE_DIR=/usr/local/include \  
-D CGAL_LIB_PATH=/usr/local/lib \  
-D BOOST_INCLUDE_DIR=/usr/local/include \  
-D BOOST_LIB_PATH=/usr/local/lib \  
-D GDAL_INCLUDE_DIR=/usr/local/include \  
-D GDAL_LIB_PATH=/usr/local/lib \  
-D XERCESC_INCLUDE_DIR=/usr/local/include \  
-D XERCESC_LIB_PATH=/usr/local/lib \  
-D GMP_INCLUDE_DIR=/usr/local/include \  
-D GMP_LIB_PATH=/usr/local/lib \  
-D MPFR_INCLUDE_DIR=/usr/local/include \  
-D MPFR_LIB_PATH=/usr/local/lib \  
-D CMAKE_VERBOSE_MAKEFILE=ON \  

```

```
.  
  
make  
  
make install
```

2.2 Pre-requisites

The SPD software library has a number of software prerequisites, which are required to build the software.

During the development process, to date, the following libraries have been included:

- Boost (<http://www.boost.org>) \geq Version 1.49
- HDF5 (<http://www.hdfgroup.org>) \geq Version 1.8.2
- GNU Scientific Library (GSL; <http://www.gnu.org/software/gsl>) \geq Version 1.14
- Xerces-C (<http://xerces.apache.org/xerces-c>) \geq Version 3.1.1
- GDAL/OGR (<http://www.gdal.org>) \geq Version 1.7
- LibLAS (<http://www.liblas.org>) \geq Version 1.6
- CGAL (<http://www.cgal.org>) \geq Version 3.8

Boost

The Boost libraries provide a set of software utilities, which form extensions to the C++ standard library (STL). There are alternatives to the individual components of boost, but boost provides a single installation, simplifying the installation process for the user, and the project conducts regular code review ensuring quality. Within SPDLib the integer numeric types definitions, python interface, type casting, file system and text processing components are used.

HDF5

The HDF5 software library, provided by the HDF group, is used to read and write HDF5 files. Using the software library provided by the HDF5 group ensures full compatibility with the HDF5 standard and optimal input / output (I/O) performance. Many systems used for scientific computing have the HDF5 libraries installed but when used with SPDLib the optional C++ libraries needs to build and the zlib library is also required.

GSL

The GSL library is provided under the terms of the GNU GSL3 license and provides numerous functions for mathematical operations as well as C struct representations for mathematical vectors and matrices. Where possible the mathematical operations required within SPDLib are provided by calling functions within GSL.

Xerces-C

The ability to parser XML is required for the metrics command and the Xerces-C parser is used.

GDAL/OGR

The GDAL/OGR library provides a common interface to read and write image and vector files in the formats commonly used within the remote sensing community. The GDAL library is provided under the MIT-X license and as such has been included within numerous open source and commercial software (e.g., QGIS and ArcMap), it is the only open source software of its type and has a large support community.

LibLAS

When SPDLib was first developed the libLAS software was the only open source library available for reading and writing the LAS file format. It is recommended that LibLAS is built with laszip support to allow compressed LAS files to be read and written.

CGAL

The CGAL library provides support for numerous computation geometry functions and algorithms. Within SPDLib CGAL has been used to generate triangulations and natural neighbour interpolation, used as the default interpolation technique throughout the library. CGAL was used as the project provides excellent documentation (The CGAL Project, 2012) and very good computational performance, important for operations such as interpolation.

2.3 Installing Pre-requisites From Source

2.4 Using the Ubuntu Package Manager

Please note that packages within the manager are always changing and there these notes may not be up to date but provide a guideline and things to look out for.

Chapter 3

The SPDLib File Format

Part II

Command Line Tools

Chapter 4

Data Management Commands

4.1 Convert File Formats – `spdtranslate`

The `spdtranslate` command is one of the key commands associated with SPDLib as it allows for the conversion between the various supported file formats, while it also supports coordinate system conversion and the definition of the data origin (mainly for TLS data).

Although, the most common use of this tool is converting data to the SPD format. The simplest command for converting to UPD (SPD with a spatial index) is shown below, where the input and output file formats have been specified alongside the field used to attribute each pulse with a location to be used if the pulses were later indexed (i.e., into an SPD file).

```
spdtranslate --if LAS --of UPD -x FIRST_RETURN -i 44123A1305_ALL.las \  
-o 44123A1305_ALL.spd
```

If you wish to explicitly define the projection of the SPD file then use the `-output_proj` switch to specify a text file containing the OGC WKT string representing the projection.

```
spdtranslate --if LAS --of UPD -x FIRST_RETURN --input_proj ./NZTM2000.wkt \  
-i 44123A1305_ALL.las -o 44123A1305_ALL.spd
```

To convert data to the SPD format, where data is indexed on to a 10 m grid the

following command is the simplest form.

```
spdtranslate --if LAS --of SPD -x FIRST_RETURN -b 10 -i 44123A1305_ALL.las \  
-o 44123A1305_ALL_10m.spd
```

4.1.1 Memory Requirements

When converting to an UPD very little memory is required as only a few pulses are held in memory at any one time (to be exact it is the number of pulses which corresponds to the UPD/SPD compress block size, see header info but probably 1000 pulses), this is because no sorting of the pulses is required. On the other hand when generating an SPD file the data needs to be spatially sorted, making no assumptions of the order the data is being read (such as it is in time sequential order). Therefore, in the command given above the whole file is read into memory and sorted into the spatial grid before being written output the file. This requires that you have sufficient memory to store the whole dataset and index data structure in memory. If you do not have sufficient memory to complete this operation the file needs to be tiled, into blocks which are small enough to fit into memory. Allowing the SPD file to be built in stages, naturally this is slower but once completed it is very fast to make spatial selections within the file and other processing steps (i.e., classification and interpolations) can be applied to the whole file with only a relatively small memory footprint (Figure 4.1).

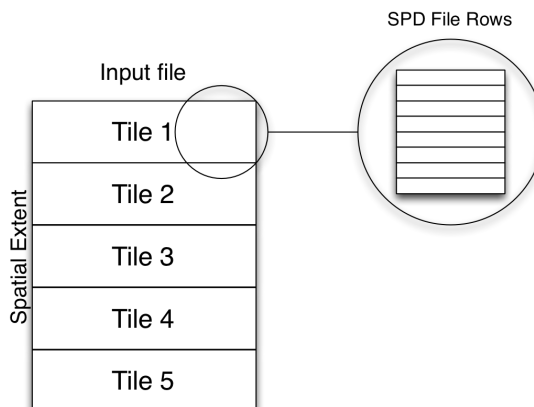


Figure 4.1: spdtranslate tiling.

The option to select tiling the file to disk while building the SPD file is `--usetmp`, when selecting this option you also need specify `--temppath` which is path and base file name while the tiles will be written. Additionally, the option `--numofrows` may need to be specified (default is 25), this parameter specifies the number of rows of the final SPD file are written to each temporary tile (note the tile height in metres (or where ever units the data is projected) is the `binsize * numofrows`). Finally, the `--numofcols` option maybe set where datasets are very wide such that the tiles are not the full width of the output file, by default this is set to 0. Where this option is used the resulting SPD file with a non-sequential rather than a sequential file generated by the other commands. This means the data on disk is not order left-to-right top-to-bottom or top-left to bottom-right, which has some performance benefits. See (?) for more details.

When running multiple conversions at the same time it is worth noting that the temp file path, or at least the base name, need to be different to avoid over writing the files of the other jobs.

```
spdtranslate --if LAS --of SPD -b 10 -x FIRST_RETURN --usetmp \  
--temppath ./tmp/44123A1305 --numofrows 50 -i 44123A1305_ALL.las \  
-o 44123A1305_ALL_10m.spd
```

```
spdtranslate --if LAS --of SPD -b 10 -x FIRST_RETURN --usetmp \  
--temppath ./tmp/44123A1305 --numofrows 50 --numofcols 50 \  
-i 44123A1305_ALL.las -o 44123A1305_ALL_10m.spd
```

Therefore, when this command runs the following steps will be completed:

1. Convert input (LAS) file to an unsorted SPD (UPD) file so the extent is calculated and pulses built – if the file is already an SPD file this step does not take place.
2. Tile the SPD file into individual unsorted SPD files base on the `--numofrows` and `--numofcols` parameters.
3. Spatial sorted (grid) each tile in memory and write to the output SPD file.

4.1.2 Supported File Formats

The file formats supported are the ones which we have so far required for our research therefore the current level of support is not intended to encompass all the available formats but it is relatively easy to add support for new formats within the C++ code so further formats will be added as and when we need them or on request from others. Therefore, if the format you require is not currently supported please let us know and we can look into adding it.

Importers

- SPD
- LAS
- ASCII
- ASCIIPULSEROW
- ASCIIMULTILINE
- FWF_DAT
- DECOMPOSED_DAT
- DECOMPOSED_COO

LAS

The LAS reader is via LibLAS ([urlhttp://www.liblas.org](http://www.liblas.org)) and therefore only supports the discrete return (LAS 1.2) data. A python script is available for reading LAS 1.3 waveform data but this is currently experimental.

ASCII

The ASCII format requires a schema, written in XML, to be supplied. The parse experts a single return per line and the resulting pulses will only contain a single

return.

The following are some examples of schema's for common ASCII formats.

A schema for the PTS format:

```
<?xml version="1.0" encoding="UTF-8" ?>
<line delimiter=" " comment="#" ignorelines="0" >
  <field name="X" type="spd_double" index="0" />
  <field name="Y" type="spd_double" index="1" />
  <field name="Z" type="spd_float" index="2" />
  <field name="AMPLITUDE_RETURN" type="spd_uint" index="3" />
  <field name="RED" type="spd_uint" index="4" />
  <field name="GREEN" type="spd_uint" index="5" />
  <field name="BLUE" type="spd_uint" index="6" />
</line>
```

A schema for the iSite PTS format:

```
<?xml version="1.0" encoding="UTF-8" ?>
<line delimiter=" " comment="#" ignorelines="0" >
  <field name="X" type="spd_double" index="0" />
  <field name="Y" type="spd_double" index="1" />
  <field name="Z" type="spd_float" index="2" />
  <field name="RED" type="spd_uint" index="3" />
  <field name="GREEN" type="spd_uint" index="4" />
  <field name="BLUE" type="spd_uint" index="5" />
  <field name="AMPLITUDE_RETURN" type="spd_uint" index="6" />
</line>
```

A schema for the XYZ format:

```
<?xml version="1.0" encoding="UTF-8" ?>
<line delimiter="," comment="#" ignorelines="0" >
  <field name="X" type="spd_double" index="0" />
  <field name="Y" type="spd_double" index="1" />
  <field name="Z" type="spd_float" index="2" />
</line>
```

A schema for the XYZI format:

```
<?xml version="1.0" encoding="UTF-8" ?>
<line delimiter="," comment="#" ignorelines="0" >
  <field name="X" type="spd_double" index="0" />
```

```
<field name="Y" type="spd_double" index="1" />
<field name="Z" type="spd_float" index="2" />
<field name="AMPLITUDE_RETURN" type="spd_uint" index="3" />
</line>
```

ASCIIPULSEROW

ASCIIMULTILINE

FWF_DAT

DECOMPOSED_DAT

DECOMPOSED_COO

Exporters

SPDLib currently provides 3 formats to which data can be exported:

- SPD
- LAS
- ASCII

LAS

LAS 1.2 files are exported through the libLAS ([urlhttp://www.liblas.org](http://www.liblas.org)) library so as with the importer only discrete return data are supported.

ASCII

The ASCII format depends on the data type (Discrete Return, Decompose Returns or Waveform Data) but the columns are named and match on to the SPD fields.

4.1.3 Examples

Converting Between Coordinate Systems

With all spatial projected data the ability to record the projection and datum and convert between different projections is an important step. To store coordinate system information SPDLib uses the well-known text (WKT) format as defined by the OGC. A large database of WKT strings for coordinate systems worldwide is available from <http://spatialreference.org>. Additionally, the `spdproj` command can be used to find the OGC WKT string from an existing image, SPD file or to convert a proj4 string.

Within the `spdtranslate` command the option `-input_proj` is used to specify the coordinate system of the inputted file and will be written to the output file if defined. The input to the `-input_proj` option is the file path to a text file with the OGC WKT string for the projection being used. Below is the WKT string for UTM Zone 55 South:

```
PROJCS["UTM Zone 55, Southern Hemisphere",GEOGCS["WGS 84",DATUM[
"WGS_1984",SPHEROID["WGS 84",6378137,298.257223563,AUTHORITY[
"EPSG","7030"]],TOWGS84[0,0,0,0,0,0],AUTHORITY["EPSG","6326"]],PRIMEM[
"Greenwich",0,AUTHORITY["EPSG","8901"]],UNIT["degree",0.0174532925199433,
AUTHORITY["EPSG","9108"]],AUTHORITY["EPSG","4326"]],PROJECTION[
"Transverse_Mercator"],PARAMETER["latitude_of_origin",0],PARAMETER[
"central_meridian",147],PARAMETER["scale_factor",0.9996],PARAMETER[
"false_easting",500000],PARAMETER["false_northing",1000000],UNIT["Meter",1]]
```

To convert the coordinate system the `-convert_proj` and `-output_proj` options need to be used where the `-output_proj` option requires the path to another OGC WKT file, specifying the output coordinate system. When converting between coordinate systems the GDAL OGR library ([urlhttp://www.gdal.org/ogr](http://www.gdal.org/ogr)) is used, which if available makes use of the proj4 library ([urlhttp://trac.osgeo.org/proj/](http://trac.osgeo.org/proj/); it is recommended that GDAL/OGR are built with this library for coordinate conversion) and therefore the restrictions, in terms of coordinate systems support, of these libraries apply. In particular, if you wish to convert datums you need to ensure you have the appropriate datum shift files installed within proj4. Although, the `spdelevation` command can be used if a datum shift grid is available as an image

or can be converted to an image.

The following command provides an example where the coordinate system (UK Ordnance Survey national grid) has been specified when converting data to an SPD file.

```
spdtranslate --if ASCIIMULTILINE --of UPD --input_proj osgb36.wkt \  
-x FIRST_RETURN -i LDR-GB08_12-2009152a09.txt -o LDR-GB08_12-2009152a09.spd
```

while the following command converts from lat/long to UTM 55s while reading the file and converting to SPD.

```
spdtranslate --if DECOMPOSED_DAT --of SPD --convert_proj --input_proj GDA94_Deg.wkt \  
--output_proj GDA94_UTM55.wkt -xFIRST_RETURN -b 1 -i p137_ahd.dat \  
-o p137_ahd_UTM_1m.spd
```

Defining the Top-Left corner of the index

Another option when creating an SPD is to define the top-left corner of the SPD index, which can be used to put the LiDAR dataset onto the same grid as another dataset (e.g., image or another LiDAR scene), useful for change detection or fusing datasets. `spdtranslate` provides three options to enable this, `-defineTL`, `-tlx` and `-tly`. Where `-tlx` and `-tly` take double values specifying the coordinate, an example is given below:

```
spdtranslate --if UPD --of SPD -b 25 --defineTL --tlx 534700 --tly 7203900 \  
--usetmp --temppath ./tmp/ --numofrows 200 -i apr2dc_injunePSUs_20090412_AHD.spd \  
-o apr2dc_injunePSUs_20090412_AHD_25m.spd
```

Indexing using Spherical Coordinate System

For airborne data indexing the pulses using a cartesian coordinate system is highly appropriate and suits almost all types of processing which might be required. For some terrestrial laser scanning data, acquired within a spherical coordinate system (Figure 4.2) it is more appropriate to store and process the data in this form, for example to monitor change (i.e., movement).

To index with a spherical coordinate system the `-spherical` option just needs to be

Figure 4.2: An example of a terrestrial laser scanning scene indexed using spherical coordinate system; the overview image from the SPD Points Viewer.

specified while if the origin of the dataset has not be specified the `--defineOrigin`, `--Ox`, `--Oy` and `--Oz` options are required to specify origin from which the azimuth, zenith and range values for each return and pulse can be calculated. An example of this is given below, note the binsize is specified in radians for a spherical index.

```
spdtranslate --if LAS --of SPD --input_proj utm55s_wgs84.wkt --defineOrigin\  
--Ox 562197.7 --Oy 7183563.8 --Oz 593.5 --spherical --binsize 0.005 \  
-i 58_forest_registered.las -o 58_forest_registered_spherical.spd
```

Indexing into a Hemispherical Image

Alternatively, it can also be useful to index the dataset into a hemisphere (Figure 4.3). The options for this are also identical to those outlined above when indexing for an unwrapped spherical coordinates, as shown below. Note the bin-size is specified in radians for a hemispherical index.

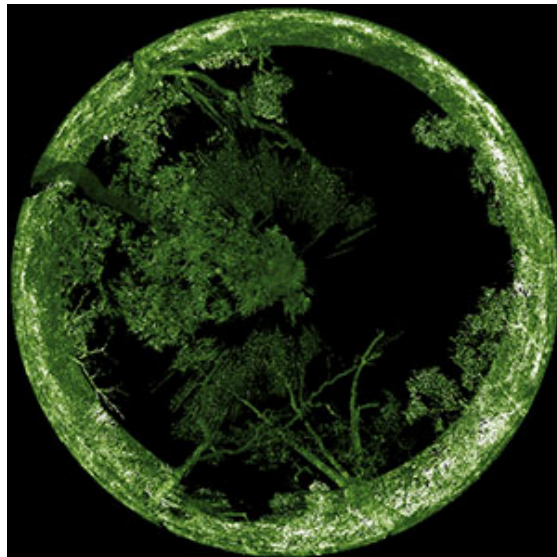


Figure 4.3: An example of a terrestrial laser scanning scene indexed into a hemisphere; the image shown is the mean intensity as generated using `spdmetrics`.

```
spdtranslate --if LAS --of SPD --input_proj utm55s_wgs84.wkt --defineOrigin \
--0x 562197.7 --0y 7183563.8 --0z 593.5 --hemispherical --binsize 0.005 \
-i 58_forest_registered.las -o 58_forest_registered_hemispherical.spd
```

4.1.4 Help File

spdtranslate SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
This program comes with ABSOLUTELY NO WARRANTY. This is free software,
and you are welcome to redistribute it under certain conditions; See
website (<http://www.spdlib.org>). Bugs are to be reported on the trac
or directly to spdlib-develop@lists.sourceforge.net

USAGE:

```
spdtranslate -o <String> -i <String> [-f] [--pulseversion <unsigned
int>] [--pointversion <unsigned int>] [--wavenoise
<float>] [--0z <float>] [--0y <double>] [--0x <double>]
[--defineOrigin] [--tly <double>] [--tlx <double>]
[--defineTL] [--keeptemp] [--convert_proj] [--output_proj
<string>] [--input_proj <string>] [-b <float>] [-c
<unsigned int>] [-r <unsigned int>] [-s <string>] [-t
<string>] [--scan] [--polar] [--spherical] [--wavebitres
<8BIT|16BIT|32BIT>] [-x <FIRST_RETURN|LAST_RETURN
|START_WAVEFORM|END_WAVEFORM|ORIGIN|MAX_INTENSITY
|UNCHANGED>] --of <SPD|UPD|ASCII|LAS> --if <SPD
|ASCIIPULSEROW|ASCII|FWF_DAT|DECOMPOSED_DAT|LAS
|DECOMPOSED_COO|ASCIIMULTILINE> [--] [--version] [-h]
```

Where:

```
-o <String>, --output <String>
    (required) The output file.

-i <String>, --input <String>
    (required) The input file.

-f, --usetmp
    Convert file buffering to disk using temporary files
```

```
--pulseversion <unsigned int>
    Specify the pulse version to be used within the SPD file (Default: 2)

--pointversion <unsigned int>
    Specify the point version to be used within the SPD file (Default: 2)

--wavenoise <float>
    Waveform noise threshold (Default 0)

--Oz <float>
    Origin Z coordinate

--Oy <double>
    Origin Y coordinate

--Ox <double>
    Origin X coordinate.

--defineOrigin
    Define the origin coordinate for the SPD.

--tly <double>
    Top left Y coordinate for defining the SPD file index.

--tlx <double>
    Top left X coordinate for defining the SPD file index.

--defineTL
    Define the top left (TL) coordinate for the SPD file index

--keeptemp
    Keep the temporary files generated during the conversion.

--convert_proj
    Convert file buffering to disk

--output_proj <string>
    WKT string representing the projection of the output file

--input_proj <string>
    WKT string representing the projection of the input file
```

-b <float>, --binsize <float>
Bin size for SPD file index (Default 1)

-c <unsigned int>, --numofcols <unsigned int>
Number of columns within a tile (Default 0), using this option
generats a non-sequential SPD file.

-r <unsigned int>, --numofrows <unsigned int>
Number of rows within a tile (Default 25)

-s <string>, --schema <string>
A schema for the format of the file being imported (Note, most
importers do not require a schema)

-t <string>, --temppath <string>
A path were temporary files can be written too

--scan
Index the pulses using a scan coordinate system

--polar
Index the pulses using a polar coordinate system

--spherical
Index the pulses using a spherical coordinate system

--wavebitres <8BIT|16BIT|32BIT>
The bit resolution used for storing the waveform data (Default: 32BIT)

-x <FIRST_RETURN|LAST_RETURN|START_WAVEFORM|END_WAVEFORM|ORIGIN
|MAX_INTENSITY|UNCHANGED>, --indexfield <FIRST_RETURN|LAST_RETURN
|START_WAVEFORM|END_WAVEFORM|ORIGIN|MAX_INTENSITY|UNCHANGED>
The location used to index the pulses (Default: UNCHANGED)

--of <SPD|UPD|ASCII|LAS>
(required) Format of the output file (Default SPD)

--if <SPD|ASCIIPULSEROW|ASCII|FWF_DAT|DECOMPOSED_DAT|LAS|DECOMPOSED_COO
|ASCIIMULTILINE>
(required) Format of the input file (Default SPD)


```
--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.

--version
  Displays version information and exits.

-h, --help
  Displays usage information and exits.
```

Convert between file formats: `spdtranslate`

4.2 Subset Data – `spdssubset`

The `spdssubset` command supports the sub-setting of any of the supported input formats. The command has two modes either a polygon (as a shapefile) can be provided and the input file will be subset to the polygon (using the `-shpfile` parameter) or the individual dimensions of the dataset can be specified and the file cut to the parameters specified. Note the parameters not specified will be replaced by the largest or smallest (depending on parameter) value in the file.

4.2.1 Subset to shapefile

```
spdssubset -shpfile polygonshp.shp -i inputLiDAR.spd -o outputLiDAR.spd
```

4.2.2 Subset to bounding box

```
spdssubset -xmin 500000 -xmax 501000 -ymin 7200000 -ymax 721000 -i inputLi-
DAR.spd -o outputLiDAR.spd
```

4.2.3 Subset to bounding volume

```
spdssubset -xmin 500000 -xmax 501000 -ymin 7200000 -ymax 721000 -zmin 250
-zmax 350 -i inputLiDAR.spd -o outputLiDAR.spd
```

4.2.4 Subset to bounding volume - using height above ground

Note, that to use this command the height field in the SPD/UPD file needs to have previously been defined (see `spddefheight`).

```
spdssubset -xmin 500000 -xmax 501000 -ymin 7200000 -ymax 721000 -hmin 0
-hmax 50 -height -i inputLiDAR.spd -o outputLiDAR.spd
```

4.2.5 Subset to minimum Y

```
spdssubset -inputformat SPD -outputformat SPD -ymin 7200000 -i inputLi-
DAR.spd -o outputLiDAR.spd
```

4.2.6 Subset to maximum Z

```
spdssubset -zmax 500 -i inputLiDAR.spd -o outputLiDAR.spd
```

4.2.7 Help File

```
spdssubset SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
This program comes with ABSOLUTELY NO WARRANTY. This is free software,
and you are welcome to redistribute it under certain conditions; See
website (http://www.spdlib.org). Bugs are to be reported on the trac
or directly to spdlib-develop@lists.sourceforge.net
```

USAGE:

```
spdssubset [--num <uint_fast32_t>] [--start <uint_fast32_t>] [--shpfile
<string>] [--ignorez] [--ignorerange] [--txtfile <string>]
[--spherical] [--height] [--ranmax <double>] [--ranmin
```

```

<double>] [--zenmax <double>] [--zenmin <double>] [--azmax
<double>] [--azmin <double>] [--hmax <double>] [--hmin
<double>] [--zmax <double>] [--zmin <double>] [--ymax
<double>] [--ymin <double>] [--xmax <double>] [--xmin
<double>] [--] [--version] [-h] <string> ...

```

Where:

```

--num <uint_fast32_t>
    Number of pulses to be exported

--start <uint_fast32_t>
    First pulse in the block

--shpfile <string>
    A shapefile to which the dataset should be subsetted to

--ignorez
    Defining that Z should be ignored when subsetting using a text file.

--ignorerange
    Defining that range should be ignored when subsetting using a text
    file.

--txtfile <string>
    A text containing the extent to which the file should be cut to.

--spherical
    Subset a spherically indexed SPD file.

--height
    Threshold the height of each pulse (currently only valid with SPD to
    SPD subsetting)

--ranmax <double>
    Maximum range threshold

--ranmin <double>
    Minimum range threshold

```

```
--zenmax <double>
    Maximum zenith threshold

--zenmin <double>
    Minimum zenith threshold

--azmax <double>
    Maximum azimuth threshold

--azmin <double>
    Minimum azimuth threshold

--hmax <double>
    Maximum Height threshold

--hmin <double>
    Minimum Height threshold

--zmax <double>
    Maximum Z threshold

--zmin <double>
    Minimum Z threshold

--ymax <double>
    Maximum Y threshold

--ymin <double>
    Minimum Y threshold

--xmax <double>
    Maximum X threshold

--xmin <double>
    Minimum X threshold

--, --ignore_rest
    Ignores the rest of the labeled arguments following this flag.

--version
    Displays version information and exits.
```

`-h, --help`

Displays usage information and exits.

`<string>` (accepted multiple times)

(required) File names for the input and output files

Subset point cloud data: `spdssubset`

4.3 Merging Data Files – `spdmerge`

4.3.1 Help File

`spdmerge` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spdmerge -o <String> [-s <std::string>] [--classes <uint_fast16_t>] ...
  [--returnIDs <uint_fast16_t>] ... [--source] [--ignorechecks]
  [-c] [-r <std::string>] [-p <std::string>] [--wavebitres <8BIT
  |16BIT|32BIT>] [-x <FIRST_RETURN|LAST_RETURN|START_WAVEFORM
  |END_WAVEFORM|ORIGIN>] -f <SPD|ASCIIPULSEROW|ASCII|FWF_DAT
  |DECOMPOSED_DAT|LAS|ASCIIMULTILINE> [--] [--version] [-h]
  <std::string> ...
```

Where:

`-o <String>`, `--output <String>`
 (required) The output SPD file.

`-s <std::string>`, `--schema <std::string>`
 A schema for the format of the file being imported (Note, most

```
importers do not require a schema)

--classes <uint_fast16_t> (accepted multiple times)
  Lists the classes for the files listed.

--returnIDs <uint_fast16_t> (accepted multiple times)
  Lists the return IDs for the files listed.

--source
  Set source ID for each input file

--ignorechecks
  Ignore checks between input files to ensure compatibility

-c, --convert_proj
  Convert file buffering to disk

-r <std::string>, --output_proj <std::string>
  WKT std::string representing the projection of the output file

-p <std::string>, --input_proj <std::string>
  WKT std::string representing the projection of the input file

--wavebitres <8BIT|16BIT|32BIT>
  The bit resolution used for storing the waveform data (Default: 32BIT)

-x <FIRST_RETURN|LAST_RETURN|START_WAVEFORM|END_WAVEFORM|ORIGIN>,
  --indexfield <FIRST_RETURN|LAST_RETURN|START_WAVEFORM|END_WAVEFORM
  |ORIGIN>
  The location used to index the pulses

-f <SPD|ASCIIPULSEROW|ASCII|FWF_DAT|DECOMPOSED_DAT|LAS|ASCIIMULTILINE>,
  --inputformat <SPD|ASCIIPULSEROW|ASCII|FWF_DAT|DECOMPOSED_DAT|LAS
  |ASCIIMULTILINE>
  (required) Format of the input file

--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.

--version
  Displays version information and exits.
```

```
-h, --help
  Displays usage information and exits.
```

```
<std::string> (accepted multiple times)
  (required) The list of input files
```

Merge compatible files into a single non-indexed SPD file: `spdmerge`

4.4 Extract Data – `spdextract`

4.4.1 Help File

`spdextract` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spdextract -o <String> -i <String> [--return <ALL|FIRST|LAST|NOTFIRST
|FIRSTLAST>] [--class <unsigned int>] [-c <unsigned int>]
[-r <unsigned int>] [--] [--version] [-h]
```

Where:

```
-o <String>, --output <String>
  (required) The output SPD file.
```

```
-i <String>, --input <String>
  (required) The input SPD file.
```

```
--return <ALL|FIRST|LAST|NOTFIRST|FIRSTLAST>
  The return(s) of interest
```

```

--class <unsigned int>
  Class of interest (Ground == 3; Not Ground == 104)

-c <unsigned int>, --blockcols <unsigned int>
  Number of columns within a block (Default 0) - Note values greater
  than 1 result in a non-sequential SPD file.

-r <unsigned int>, --blockrows <unsigned int>
  Number of rows within a block (Default 100)

--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.

--version
  Displays version information and exits.

-h, --help
  Displays usage information and exits.

```

Extract returns and pulses which meet a set of criteria: `spdextract`

4.5 Copying Data – `spdcopy`

4.5.1 Help File

`spdcopy` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```

spdcopy -o <String> -i <String> [-c <unsigned int>] [-r <unsigned int>]
      [--] [--version] [-h]

```


Where:

- o <String>, --output <String>
(required) The output file.
- i <String>, --input <String>
(required) The input file.
- c <unsigned int>, --blockcols <unsigned int>
Number of columns within a block (Default 0) - Note values greater than 1 result in a non-sequential SPD file.
- r <unsigned int>, --blockrows <unsigned int>
Number of rows within a block (Default 100)
- , --ignore_rest
Ignores the rest of the labeled arguments following this flag.
- version
Displays version information and exits.
- h, --help
Displays usage information and exits.

Makes a copy of an indexed SPD file: spdcopy

4.6 Overlap – spdooverlap

4.6.1 Help File

spdooverlap SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
This program comes with ABSOLUTELY NO WARRANTY. This is free software,
and you are welcome to redistribute it under certain conditions; See
website (<http://www.spdlib.org>). Bugs are to be reported on the trac
or directly to spdlib-develop@lists.sourceforge.net

USAGE:

```
spdoverlap {-c|-s} [-o <String>] [--] [--version] [-h] <string> ...
```

Where:

```
-c, --cartesian
  (OR required) Find cartesian overlap.
```

```
-- OR --
```

```
-s, --spherical
  (OR required) Find spherical overlap.
```

```
-o <String>, --output <String>
  The output file.
```

```
--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.
```

```
--version
  Displays version information and exits.
```

```
-h, --help
  Displays usage information and exits.
```

```
<string> (accepted multiple times)
  (required) File names for the output (if required) and input files
```

Calculate the overlap between UPD and SPD files: `spdoverlap`

4.7 Registration – `spdwrap`

4.7.1 Help File

`spdwrap` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See

website (<http://www.spdlib.org>). Bugs are to be reported on the trac or directly to spdlib-develop@lists.sourceforge.net

USAGE:

```
spdwrap {--shift|--warp} -o <String> -i <String> [-c <unsigned int>]
        [-r <unsigned int>] [-y <float>] [-x <float>] [-g
        <std::string>] [--order <unsigned int>] [-p <>] [-t <POLYNOMIAL
        |NEAREST_NEIGHBOR|TRIANGULATION>] [--] [--version] [-h]
```

Where:

```
--shift
  (OR required) Apply a linear shift to the SPD file.
  -- OR --
--warp
  (OR required) Apply a nonlinear warp to the SPD file defined by a set
  of GCPs.

-o <String>, --output <String>
  (required) The output SPD file.

-i <String>, --input <String>
  (required) The input SPD file.

-c <unsigned int>, --blockcols <unsigned int>
  Number of columns within a block (Default 0) - Note values greater
  than 1 result in a non-sequential SPD file.

-r <unsigned int>, --blockrows <unsigned int>
  Number of rows within a block (Default 100)

-y <float>, --yshift <float>
  SHIFT: The y shift in the units of the dataset (probably metres).

-x <float>, --xshift <float>
  SHIFT: The x shift in the units of the dataset (probably metres).

-g <std::string>, --gcps <std::string>
```

WARP: The path and file name of the gcps file.

--order <unsigned int>

POLY TRANSFORM (Default=3): The order of the polynomial fitted.

-p <>, --pulsewarp <>

WARP (Default=PULSE_IDX): The eastings and northings used to calculate the warp. ALL_RETURNS recalculates the offsets for each X,Y while PULSE_IDX and PULSE_ORIGIN use a single offset for the whole pulse.

-t <POLYNOMIAL|NEAREST_NEIGHBOR|TRIANGULATION>, --transform <POLYNOMIAL|NEAREST_NEIGHBOR|TRIANGULATION>

WARP (Default=POLYNOMIAL): The transformation model to be fitted to the GPCs and used to warp the data.

--, --ignore_rest

Ignores the rest of the labeled arguments following this flag.

--version

Displays version information and exits.

-h, --help

Displays usage information and exits.

Interpolate a raster elevation surface: spdwarp

4.8 Tiling Data

4.8.1 Defining Tiles – spddefiles

Help File

spddefiles SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to spdlib-develop@lists.sourceforge.net

USAGE:

```
spddefiles {-t|-e} [-i <String>] [-o <String>] [--ymax <double>]
           [--xmax <double>] [--ymin <double>] [--xmin <double>]
           [--overlap <double>] [--ysize <double>] [--xsize <double>]
           [--] [--version] [-h]
```

Where:

```
-t, --tiles
  (OR required) Define a set of tiles for a region.
  -- OR --
-e, --extent
  (OR required) Calculate the extent of a set of files.

-i <String>, --input <String>
  Input file listing the set of input files (--extent).

-o <String>, --output <String>
  Output XML file defining the tiles (--tiles).

--ymax <double>
  Y max (in units of coordinate systems) of the region to be tiled
  (--tiles).

--xmax <double>
  X max (in units of coordinate systems) of the region to be tiled
  (--tiles).

--ymin <double>
  Y min (in units of coordinate systems) of the region to be tiled
  (--tiles).

--xmin <double>
  X min (in units of coordinate systems) of the region to be tiled
  (--tiles).

--overlap <double>
```

Size (in units of coordinate systems) of the overlap for tiles
(Default 100) (`--tiles`).

`--ysize <double>`
Y size (in units of coordinate systems) of the tiles (Default 1000)
(`--tiles`).

`--xsize <double>`
X size (in units of coordinate systems) of the tiles (Default 1000)
(`--tiles`).

`--`, `--ignore_rest`
Ignores the rest of the labeled arguments following this flag.

`--version`
Displays version information and exits.

`-h`, `--help`
Displays usage information and exits.

Tools for defining a set of tiles: `spddeftiles`

4.8.2 Performing Tiling – `spdtiling`

Help File

`spdtiling` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
This program comes with ABSOLUTELY NO WARRANTY. This is free software,
and you are welcome to redistribute it under certain conditions; See
website (<http://www.spdlib.org>). Bugs are to be reported on the trac
or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spdtiling {-a|-e} [-u] [-d] [-c <Unsigned int>] [-r <Unsigned int>] -i
          <String> -o <String> -t <String> [--] [--version] [-h]
```

Where:

```
-a, --all
  (OR required) Create all tiles.
  -- OR --
-e, --extract
  (OR required) Calculate the extent of a set of files.

-u, --updatexml
  Update the tiles XML file.

-d, --deltiles
  Remove tiles which have no data.

-c <Unsigned int>, --col <Unsigned int>
  The column of the tile to be extracted (--extract).

-r <Unsigned int>, --row <Unsigned int>
  The row of the tile to be extracted (--extract).

-i <String>, --input <String>
  (required) A text file with a list of input files, one per line.

-o <String>, --output <String>
  (required) The base path for the tiles.

-t <String>, --tiles <String>
  (required) XML file defining the tile regions

--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.

--version
  Displays version information and exits.

-h, --help
  Displays usage information and exits.
```

Tools for tiling a set of SPD files using predefined tile areas:

spdtiling

4.8.3 Mosaicing Results – spdtileimg

Help File

spdtileimg SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to spdlib-develop@lists.sourceforge.net

USAGE:

```
spdtileimg {-m|-c} [-i <String>] [-t <String>] [-o <String>] [-w
  <String>] [-r <double>] [-f <String>] [--] [--version] [-h]
```

Where:

```
-m, --mosaic
  (OR required) Mosaic the images (within the input list) together.
  -- OR --
-c, --clump
  (OR required) Create a clumps image specifying the location of the
  tiles.

-i <String>, --input <String>
  The text file with a list of input files.

-t <String>, --tiles <String>
  The input XML file defining the tiles.

-o <String>, --output <String>
  The output image.

-w <String>, --wkt <String>
  A file containing the WKT string representing the projection (--clump
```


only).

`-r <double>, --resolution <double>`

The output image pixel size (`--clump` only).

`-f <String>, --format <String>`

The output image format.

`--, --ignore_rest`

Ignores the rest of the labeled arguments following this flag.

`--version`

Displays version information and exits.

`-h, --help`

Displays usage information and exits.

Tools for mosaicing raster results following tiling: `spdtileimg`

Chapter 5

Utility Commands

5.1 SPDLib Version – spdversion

5.1.1 Help File

```
spdversion SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
This program comes with ABSOLUTELY NO WARRANTY. This is free software,
and you are welcome to redistribute it under certain conditions; See
website (http://www.spdlib.org). Bugs are to be reported on the trac
or directly to spdlib-develop@lists.sourceforge.net
```

USAGE:

```
spdversion [--] [--version] [-h] <string> ...
```

Where:

```
--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.

--version
  Displays version information and exits.

-h, --help
```

Displays usage information and exits.

<string> (accepted multiple times)
File names for the input files

Prints version information: `spdversion`

5.2 File Summary – `spinfo`

5.2.1 Help File

`spinfo` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
This program comes with ABSOLUTELY NO WARRANTY. This is free software,
and you are welcome to redistribute it under certain conditions; See
website (<http://www.spdlib.org>). Bugs are to be reported on the trac
or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spinfo [--] [--version] [-h] <string> ...
```

Where:

`--`, `--ignore_rest`
Ignores the rest of the labeled arguments following this flag.

`--version`
Displays version information and exits.

`-h`, `--help`
Displays usage information and exits.

<string> (accepted multiple times)
Input file

Print header info for an SPD File: `spdinfo`

5.3 Find WKT Projections – `spdproj`

5.3.1 Help File

USAGE:

```
spdproj {--proj4 <string>|--proj4pretty <string>|--image <string>
        |--imagepretty <string>|--spd <string>|--spdpretty <string>}
        [--] [--version] [-h]
```

Where:

```
--proj4 <string>
  (OR required) Enter a proj4 string (to print WKT)
  -- OR --
--proj4pretty <string>
  (OR required) Enter a proj4 string (to print Pretty WKT)
  -- OR --
--image <string>
  (OR required) Print the WKT string associated with the input image.
  -- OR --
--imagepretty <string>
  (OR required) Print the WKT (to print Pretty WKT) string associated
  with the input image.
  -- OR --
--spd <string>
  (OR required) Print the WKT string associated with the input spd
  file.
  -- OR --
--spdpretty <string>
  (OR required) Print the WKT (to print Pretty WKT) string associated
  with the input spd file.

--, --ignore_rest
```

Ignores the rest of the labeled arguments following this flag.

`--version`

Displays version information and exits.

`-h, --help`

Displays usage information and exits.

Print and convert projection strings: `spdproj`

5.4 Errors with LAS files – `spdlastest`

5.4.1 Help File

`spdlastest` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spdlastest {-p|-c|-f} -i <String> [-n <unsigned int>] [-s <unsigned
int>] [--] [--version] [-h]
```

Where:

`-p, --print`

(OR required) Print a selction of pulses from LAS file.

-- OR --

`-c, --count`

(OR required) Count the number of pulses in LAS file.

-- OR --

`-f, --notfirst`

(OR required) Print the returns which start a pulse with point IDs
 greater than 1

```

-i <String>, --input <String>
  (required) The input SPD file.

-n <unsigned int>, --number <unsigned int>
  Number of pulses to be printed out (Default 10)

-s <unsigned int>, --start <unsigned int>
  Starting pulse index (Default 0)

--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.

--version
  Displays version information and exits.

-h, --help
  Displays usage information and exits.

```

Print data pulses from a LAS file - for debugging: `spdlastest`

5.5 Clear all classifications – `spdclearclass`

5.5.1 Help File

`spdclearclass` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```

spdclearclass -o <String> -i <String> [-c <unsigned int>] [-r <unsigned
int>] [--] [--version] [-h]

```

Where:

- o <String>, --output <String>
(required) The output SPD file.

- i <String>, --input <String>
(required) The input SPD file.

- c <unsigned int>, --blockcols <unsigned int>
Number of columns within a block (Default 0) - Note values greater than 1 result in a non-sequential SPD file.

- r <unsigned int>, --blockrows <unsigned int>
Number of rows within a block (Default 100)

- , --ignore_rest
Ignores the rest of the labeled arguments following this flag.

- version
Displays version information and exits.

- h, --help
Displays usage information and exits.

Clear the classification of an SPD file: `spdclearclass`

5.6 Define RGB Values – `spddefrgb`

5.6.1 Help File

`spddefrgb` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
This program comes with ABSOLUTELY NO WARRANTY. This is free software,
and you are welcome to redistribute it under certain conditions; See
website (<http://www.spdlib.org>). Bugs are to be reported on the trac
or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spddefrgb {--define|--stretch} -o <String> --image <String> -i <String>
  [--blue <uint_fast16_t>] [--green <uint_fast16_t>] [--red
  <uint_fast16_t>] [-c <unsigned int>] [-r <unsigned int>]
  [--stddev] [--linear] [--] [--version] [-h]
```

Where:

```
--define
  (OR required) Define the RGB values on an SPD file from an input
  image.
  -- OR --
--stretch
  (OR required) Stretch existing RGB values to a range of 0 to 255.

-o <String>, --output <String>
  (required) The output SPD file.

--image <String>
  (required) The input image file.

-i <String>, --input <String>
  (required) The input SPD file.

--blue <uint_fast16_t>
  Image band for blue channel

--green <uint_fast16_t>
  Image band for green channel

--red <uint_fast16_t>
  Image band for red channel

-c <unsigned int>, --blockcols <unsigned int>
  Number of columns within a block (Default 0) - Note values greater
  than 1 result in a non-sequential SPD file.

-r <unsigned int>, --blockrows <unsigned int>
```

Number of rows within a block (Default 100)

`--stddev`

Use a linear 2 standard deviation stretch.

`--linear`

Use a linear stretch between the min and max values.

`--`, `--ignore_rest`

Ignores the rest of the labeled arguments following this flag.

`--version`

Displays version information and exits.

`-h`, `--help`

Displays usage information and exits.

Define the RGB values on the SPDFFile: `spddefrgb`

5.7 Generate an image mask – `spdmaskgen`

5.7.1 Help File

`spdstats` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spdmaskgen -o <String> -i <String> [-f <string>] [-b <float>] [-c
    <unsigned int>] [-r <unsigned int>] [-p <unsigned int>] [--]
    [--version] [-h]
```

Where:

-o <String>, --output <String>
(required) The output SPD file.

-i <String>, --input <String>
(required) The input SPD file.

-f <string>, --format <string>
Image format (GDAL driver string), Default is ENVI.

-b <float>, --binsize <float>
Bin size for processing and output image (Default 0) - Note 0 will use the native SPD file bin size.

-c <unsigned int>, --blockcols <unsigned int>
Number of columns within a block (Default 0) - Note values greater than 1 result in a non-sequential SPD file.

-r <unsigned int>, --blockrows <unsigned int>
Number of rows within a block (Default 100)

-p <unsigned int>, --numpulses <unsigned int>
Number of pulses for a bin to be included in mask (Default 1)

--, --ignore_rest
Ignores the rest of the labeled arguments following this flag.

--version
Displays version information and exits.

-h, --help
Displays usage information and exits.

Generate a binary mask for the an input SPD File: spdmaskgen

5.8 Generate Statistics – spdstats

5.8.1 Help File

spdstats SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to spdlib-develop@lists.sourceforge.net

USAGE:

```
spdstats {--image|--overall} -o <String> -i <String> [-f <string>] [-b
    <float>] [-c <unsigned int>] [-r <unsigned int>] [--]
    [--version] [-h]
```

Where:

```
--image
    (OR required) Create a point / pulses density statistics image
    -- OR --
--overall
    (OR required) Create overall statistics for point / pulse density

-o <String>, --output <String>
    (required) The output SPD file.

-i <String>, --input <String>
    (required) The input SPD file.

-f <string>, --format <string>
    Image format (GDAL driver string), Default is ENVI.

-b <float>, --binsize <float>
    Bin size for processing and output image (Default 0) - Note 0 will use
    the native SPD file bin size.

-c <unsigned int>, --blockcols <unsigned int>
```

Number of columns within a block (Default 0) - Note values greater than 1 result in a non-sequential SPD file.

`-r <unsigned int>`, `--blockrows <unsigned int>`
 Number of rows within a block (Default 100)

`--`, `--ignore_rest`
 Ignores the rest of the labeled arguments following this flag.

`--version`
 Displays version information and exits.

`-h`, `--help`
 Displays usage information and exits.

Provides statistics the point and pulse density of an SPD file: `spdstats`

5.9 Thin the point cloud – `spdthin`

5.9.1 Help File

`spdthin` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spdthin -o <String> -i <String> [-n <unsigned int>] [-c <unsigned int>]
      [-r <unsigned int>] [--] [--version] [-h]
```

Where:

`-o <String>`, `--output <String>`
 (required) The output SPD file.

`-i <String>, --input <String>`
(required) The input SPD file.

`-n <unsigned int>, --numpulses <unsigned int>`
Number of pulses within the bin (Default 1).

`-c <unsigned int>, --blockcols <unsigned int>`
Number of columns within a block (Default 0) - Note values greater than 1 result in a non-sequential SPD file.

`-r <unsigned int>, --blockrows <unsigned int>`
Number of rows within a block (Default 100)

`--, --ignore_rest`
Ignores the rest of the labeled arguments following this flag.

`--version`
Displays version information and exits.

`-h, --help`
Displays usage information and exits.

Thin a point cloud to a defined bin spacing: `spdthin`

Chapter 6

Data Processing Tools

6.1 Decompose Waveforms – spddecomp

6.1.1 Help File

```
spddecomp SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
This program comes with ABSOLUTELY NO WARRANTY. This is free software,
and you are welcome to redistribute it under certain conditions; See
website (http://www.spdlib.org). Bugs are to be reported on the trac
or directly to spdlib-develop@lists.sourceforge.net
```

USAGE:

```
spddecomp -o <String> -i <String> [-a] [-d <float>] [-w
    <uint_fast32_t>] [-e <uint_fast32_t>] [-n] [-t
    <uint_fast32_t>] [-c <unsigned int>] [-r <unsigned int>] [--]
    [--version] [-h]
```

Where:

```
-o <String>, --output <String>
    (required) The output file.
```

```
-i <String>, --input <String>
```

(required) The input file.

-a, --all
Fit all Gaussian at once

-d <float>, --decay <float>
Decay value for ignoring ringing artifacts (Default 5)

-w <uint_fast32_t>, --window <uint_fast32_t>
Window for the values taken either side of the peak for fitting
(Default 5)

-e <uint_fast32_t>, --decaythres <uint_fast32_t>
Intensity threshold above which a decay function is used (Default 100)

-n, --noise
Estimate noise. Only applicable when --all is set. Note an initial estimate is required for peak detection (see -t)

-t <uint_fast32_t>, --threshold <uint_fast32_t>
Noise threshold below which peaks are ignored (Default: Value in pulse->waveNoiseThreshold)

-c <unsigned int>, --blockcols <unsigned int>
Number of columns within a block (Default 0) - Note values greater than 1 result in a non-sequential SPD file.

-r <unsigned int>, --blockrows <unsigned int>
Number of rows within a block (Default 100)

--, --ignore_rest
Ignores the rest of the labeled arguments following this flag.

--version
Displays version information and exits.

-h, --help
Displays usage information and exits.

Decompose full waveform data to create discrete points: `spddecomp`

6.2 Define Height Fields – spddefheight

The `spddefheight` command is used to define the height field within both the pulse and point fields of the SPD data file. This can be done in two ways, the simplest is the use of a DTM of the same resolution as the SPD file bin size. The disadvantage of using a DTM is that it is in effect using a series of spot heights and this can introduce artefacts. Therefore, interpolating a value for each point/pulse generates a continuous surface reducing any artefacts. The recommended approach is to use Natural Neighbour interpolation, as demonstrated in the paper of (Bater and Coops, 2009).

6.2.1 Without Interpolation, using DTM

Using the DTM method the only parameters are the input file and output files. The raster DTM needs to be the same resolution as the SPD grid and it can be any raster format supported by the GDAL library.

```
spddefheight --dtm -i p144_LiDAR_1m_grd.spd -e dtm_1m.keg -o p144_LiDAR_1m_grd_ht.spd
```

6.2.2 Interpolation Mode

The interpolators are the same as those defined within the `spdinterp` command with the same parameters so look to this command for details on their use and information on the thinning process available using the `-thin` parameters.

The recommended command using the natural neighbour interpolation algorithm, along with the default parameters, is shown below:

```
spddefheight --interp --in NATURAL_NEIGHBOR -i liukdr_40205250_20090601_1m_grd.spd \  
-o liukdr_40205250_20090601_1m_grd_nnht.spd
```

While with the wider range of options to control the block size used for processing (and therefore memory usage) and the thinning process is given below.

```
spddefheight --interp --overlap 20 --block 200 --thin --thinres 0.5 --ptsperbin 1 \  
--in NATURAL_NEIGHBOR -i liukdr_40205250_20090601_1m_grd.spd \  
-o liukdr_40205250_20090601_1m_grd_nnht.spd
```

6.2.3 Help File

spddefheight SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to spdlib-develop@lists.sourceforge.net

USAGE:

```
spddefheight  {--interp|--image} -o <String> [-e <String>] -i <String>
              [--idxres <float>] [--thinres <float>] [--ptsperbin
              <uint_fast16_t>] [--thin] [--tpsnopts <uint_fast16_t>]
              [--tpsRadius <float>] [--stdDevRadius <float>]
              [--largeRadius <float>] [--smallRadius <float>]
              [--stddevThreshold <float>] [--in <TIN_PLANE
              |NEAREST_NEIGHBOR|NATURAL_NEIGHBOR|STDEV_MULTISCALE
              |TPS_RAD|TPS_PTNO>] [-b <float>] [--overlap
              <uint_fast16_t>] [-c <unsigned int>] [-r <unsigned int>]
              [--] [--version] [-h]
```

Where:

```
--interp
  (OR required) Use interpolation of the ground returns to calculate
  ground elevation
  -- OR --
--image
  (OR required) Use an image which defines the ground elevation.

-o <String>, --output <String>
  (required) The output file.

-e <String>, --elevation <String>
  The input elevation image.

-i <String>, --input <String>
  (required) The input SPD file.
```

```
--idxres <float>
  Resolution of the grid index used for some interpolates

--thinres <float>
  Resolution of the grid used to thin the point cloud

--ptsperbin <uint_fast16_t>
  The number of point allowed within a grid cell following thinning

--thin
  Thin the point cloud when interpolating

--tpsnopts <uint_fast16_t>
  TPS: (TPS_RAD - minimum) Number of points to be used by TPS algorithm

--tpsRadius <float>
  TPS: (TPS_PTNO - maximum) Radius used to retrieve data in TPS
  algorithm

--stdDevRadius <float>
  STDEV_MULTISCALE: Radius used to calculate the standard deviation

--largeRadius <float>
  STDEV_MULTISCALE: Large radius to be used when standard deviation is
  low

--smallRadius <float>
  STDEV_MULTISCALE: Smaller radius to be used when standard deviation is
  high

--stddevThreshold <float>
  STDEV_MULTISCALE: Standard Deviation threshold

--in <TIN_PLANE|NEAREST_NEIGHBOR|NATURAL_NEIGHBOR|STDEV_MULTISCALE
  |TPS_RAD|TPS_PTNO>
  The interpolator to be used.

-b <float>, --binsize <float>
  Bin size for processing and output image (Default 0) - Note 0 will use
  the native SPD file bin size.
```

```

--overlap <uint_fast16_t>
    Size (in bins) of the overlap between processing blocks (Default 10)

-c <unsigned int>, --blockcols <unsigned int>
    Number of columns within a block (Default 0) - Note values greater
    than 1 result in a non-sequential SPD file.

-r <unsigned int>, --blockrows <unsigned int>
    Number of rows within a block (Default 100)

--, --ignore_rest
    Ignores the rest of the labeled arguments following this flag.

--version
    Displays version information and exits.

-h, --help
    Displays usage information and exits.

```

Define the height field within pulses and points: `spdefheight`

6.3 Shift Elevation (Datum) – `spdelevation`

6.3.1 Help File

`spdelevation` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```

spdelevation  [--constant <double>|--variable <string>} {--add|--minus}
              -o <String> -i <String> [-c <unsigned int>] [-r <unsigned
              int>] [--] [--version] [-h]

```

Where:

```
--constant <double>
  (OR required) Alter pulse elevation by a constant amount
  -- OR --
--variable <string>
  (OR required) Alter pulse elevation by a variable amount defined
  using an image

--add
  (OR required) Add offset
  -- OR --
--minus
  (OR required) Remove offset

-o <String>, --output <String>
  (required) The output SPD file.

-i <String>, --input <String>
  (required) The input SPD file.

-c <unsigned int>, --blockcols <unsigned int>
  Number of columns within a block (Default 0) - Note values greater
  than 1 result in a non-sequential SPD file.

-r <unsigned int>, --blockrows <unsigned int>
  Number of rows within a block (Default 100)

--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.

--version
  Displays version information and exits.

-h, --help
  Displays usage information and exits.
```

Alter the elevation of the pulses: `spdelevation`

6.4 Interpolate Raster Surfaces – `spdinterp`

6.4.1 Help File

`spdinterp` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spdinterp {--dtm|--chm|--dsm} {--topo|--height} -o <String> -i <String>
  [--idxres <float>] [--thinres <float>] [--ptsperbin
  <uint_fast16_t>] [--thin] [--tpsnopts <uint_fast16_t>]
  [--tpsRadius <float>] [--stdDevRadius <float>] [--largeRadius
  <float>] [--smallRadius <float>] [--stddevThreshold <float>]
  [--in <TIN_PLANE|NEAREST_NEIGHBOR|NATURAL_NEIGHBOR
  |STDEV_MULTISCALE|TPS_RAD|TPS_PTNO>] [-f <string>] [-b
  <float>] [--overlap <uint_fast16_t>] [-c <unsigned int>] [-r
  <unsigned int>] [--] [--version] [-h]
```

Where:

```
--dtm
  (OR required) Interpolate a DTM image
  -- OR --
--chm
  (OR required) Interpolate a CHM image.
  -- OR --
--dsm
  (OR required) Interpolate a DSM image.

--topo
```

(OR required) Use topographic elevation
-- OR --
--height
(OR required) Use height above ground elevation.

-o <String>, --output <String>
(required) The output SPD file.

-i <String>, --input <String>
(required) The input SPD file.

--idxres <float>
Resolution of the grid index used for some interpolates

--thinres <float>
Resolution of the grid used to thin the point cloud

--ptsperbin <uint_fast16_t>
The number of point allowed within a grid cell following thinning

--thin
Thin the point cloud when interpolating

--tpsnopts <uint_fast16_t>
TPS: (TPS_RAD - minimum) Number of points to be used by TPS algorithm

--tpsRadius <float>
TPS: (TPS_PTNO - maximum) Radius used to retrieve data in TPS algorithm

--stdDevRadius <float>
STDEV_MULTISCALE: Radius used to calculate the standard deviation

--largeRadius <float>
STDEV_MULTISCALE: Large radius to be used when standard deviation is low

--smallRadius <float>
STDEV_MULTISCALE: Smaller radius to be used when standard deviation is high

```
--stddevThreshold <float>
  STDEV_MULTISCALE: Standard Deviation threshold

--in <TIN_PLANE|NEAREST_NEIGHBOR|NATURAL_NEIGHBOR|STDEV_MULTISCALE
  |TPS_RAD|TPS_PTNO>
  The interpolator to be used.

-f <string>, --format <string>
  Image format (GDAL driver string), Default is ENVI.

-b <float>, --binsize <float>
  Bin size for processing and output image (Default 0) - Note 0 will use
  the native SPD file bin size.

--overlap <uint_fast16_t>
  Size (in bins) of the overlap between processing blocks (Default 10)

-c <unsigned int>, --blockcols <unsigned int>
  Number of columns within a block (Default 0) - Note values greater
  than 1 result in a non-sequential SPD file.

-r <unsigned int>, --blockrows <unsigned int>
  Number of rows within a block (Default 100)

--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.

--version
  Displays version information and exits.

-h, --help
  Displays usage information and exits.
```

Interpolate a raster elevation surface: `spdinterp`

6.5 Classify Ground Returns

6.5.1 Progressive Morphology Filter – `spdpmfgrd`

The `spdpmfgrd` command is an implementation of the progressive morphological filter algorithm of (Zhang et al., 2003).

The algorithm works by generating an initial minimum return raster surface at the bin resolution of the SPD-file. Circulate morphological operators of a range of scales (starting at `-initfilter` size and going up in increments of 1 to `-maxfilter`). At each scale a morphological closing (erosion + dilation) operation is performed. The new height value from the morphological operator is kept if it is above the elevation difference threshold (initialised to `-initelev` with maximum value of `-maxelev`) where the elevation difference threshold is increased between threshold using the `-slope` parameter. Finally, to classify the LiDAR returns a buffer threshold (`-grd`) is used such that all the point within the buffer or below the surface are classified as ground. Before the classification, by default, a median filter is applied to the final raster surface. The size of the median filter can be specified with the `-medianfilter` parameter and the use of the median filter can be turned off using the `-nomedianfilter` parameter.

Examples

Default Command

Under most circumstances the default parameters for the algorithm will be

fit for purpose and it is recommend that you try these

first with the following command.

```
spdpmfgrd -i liukdr_20090601_1m.spd -o liukdr_20090601_1m_grd.spd
```

Processing Bin Size

The processing bin size can be changed (by default it is the bin size of the SPD file) as shown below:

```
spdpmfgrd -b 1 -i liukdr_20090601_10m.spd -o liukdr_20090601_10m_grd.spd
```

Using Block and Overlap Parameters

Notice that as with the other similar commands the block and overlap sizes can also be adjusted, as shown below:

```
spdpmfgrd --overlap 10 -c 100 -r 100 -i liukdr_20090601_1m.spd \  
-o liukdr_20090601_1m_grd.spd
```

Changing the Filter Sizes

```
spdpmfgrd --initfilter 2 --maxfilter 12 -i liukdr_20090601_1m.spd \  
-o liukdr_20090601_1m_grd.spd
```

Changing the Elevation Difference Threshold

```
spdpmfgrd --initelev 0.3 --maxelev 5 --slope 0.3 -i liukdr_20090601_1m.spd \  
-o liukdr_20090601_1m_grd.spd
```

Change Ground Return Classification Threshold

```
spdpmfgrd --grd 0.3 -i liukdr_20090601_1m.spd -o liukdr_20090601_1m_grd.spd
```

Filter points depending on class

The `-class` option allows the filter to be applied to returns of a particular class (i.e., if you have ground returns classified but it needs tidying up etc). It's useful for TLS as it can take a thick slice with mcc algorithm and then use the PMF algorithm to tidy that result up to get a good overall ground classification.

Help File

spdpmfgrd SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to spdlib-develop@lists.sourceforge.net

USAGE:

```
spdpmfgrd -o <String> -i <String> [--gdal <string>] [--class
<uint_fast16_t>] [--image] [--medianfilter <uint_fast16_t>]
[--nomedian] [--grd <float>] [--maxelev <float>] [--initelev
<float>] [--slope <float>] [--maxfilter <uint_fast16_t>]
[--initfilter <uint_fast16_t>] [--overlap <uint_fast16_t>]
[-b <float>] [-c <unsigned int>] [-r <unsigned int>] [--]
[--version] [-h]
```

Where:

```
-o <String>, --output <String>
    (required) The output file.

-i <String>, --input <String>
    (required) The input SPD file.

--gdal <string>
    Provide the GDAL driver format (Default ENVI), Erdas Imagine is HFA,
    KEA is KEA

--class <uint_fast16_t>
    Only use points of particular class

--image
    If set an image of the output surface will be generated rather than
    classifying the points (useful for debugging and parameter selection)

--medianfilter <uint_fast16_t>
    Size of the median filter (half size i.e., 3x3 is 1) (Default 2)
```

```
--nomedian
  Do not run a median filter on generated surface (before classifying
  ground point or export)

--grd <float>
  Threshold for deviation from identified ground surface for classifying
  the ground returns (Default 0.3)

--maxelev <float>
  Maximum elevation difference threshold (Default 5)

--initelev <float>
  Initial elevation difference threshold (Default 0.3)

--slope <float>
  Slope parameter related to terrain (Default 0.3)

--maxfilter <uint_fast16_t>
  Maximum size of the filter (Default 7)

--initfilter <uint_fast16_t>
  Initial size of the filter (note this is half the filter size so a 3x3
  will be 1 and 5x5 will be 2) (Default 1)

--overlap <uint_fast16_t>
  Size (in bins) of the overlap between processing blocks (Default 10)

-b <float>, --binsize <float>
  Bin size for processing and output image (Default 0) - Note 0 will use
  the native SPD file bin size.

-c <unsigned int>, --blockcols <unsigned int>
  Number of columns within a block (Default 0) - Note values greater
  than 1 result in a non-sequential SPD file.

-r <unsigned int>, --blockrows <unsigned int>
  Number of rows within a block (Default 100)

--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.
```

```
--version
  Displays version information and exits.
```

```
-h, --help
  Displays usage information and exits.
```

Classifies the ground returns using the progressive morphology algorithm: `spdpmfgrd`

6.5.2 Multi-Curvature Classifier – `spdmccgrd`

Help File

`spdmccgrd` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spdmccgrd -o <String> -i <String> [--thresofchangemultireturn] [--class
  <uint_fast16_t>] [--median] [--thresofchange <float>]
  [--filtersize <uint_fast16_t>] [--interpnumpts
  <uint_fast16_t>] [--interpmaxradius <float>] [--stepcurvetol
  <float>] [--mincurvetol <float>] [--initcurvetol <float>]
  [--scalegaps <float>] [--numofscalesbelow <uint_fast16_t>]
  [--numofscalesabove <uint_fast16_t>] [--initscale <float>]
  [--overlap <uint_fast16_t>] [-b <float>] [-c <unsigned int>]
  [-r <unsigned int>] [--] [--version] [-h]
```

Where:

```
-o <String>, --output <String>
  (required) The output SPD file.
```

```
-i <String>, --input <String>
```

(required) The input SPD file.

--thresofchangemultireturn
Use only multiple return pulses to calculate the amount of change between iterations.

--class <uint_fast16_t>
Only use points of particular class

--median
Use a median filter to smooth the generated raster instead of a (mean) averaging filter.

--thresofchange <float>
The threshold for the (Default = 0.1)

--filtersize <uint_fast16_t>
The size of the smoothing filter (half size i.e., 3x3 is 1; Default = 1).

--interpnumpts <uint_fast16_t>
The number of points used for the TPS interpolation (Default = 16)

--interpmaxradius <float>
Maximum search radius for the TPS interpolation (Default = 20)

--stepcurvetol <float>
Iteration step curveture tolerance parameter (Default = 0.5)

--mincurvetol <float>
Minimum curveture tolerance parameter (Default = 0.1)

--initcurvetol <float>
Initial curveture tolerance parameter (Default = 1)

--scalegaps <float>
Gap between increments in scale (Default = 0.5)

--numofscalesbelow <uint_fast16_t>
The number of scales below the init scale to be used (Default = 1)

```
--numofscalesabove <uint_fast16_t>
    The number of scales above the init scale to be used (Default = 1)

--initscale <float>
    Initial processing scale, this is usually the native resolution of the
    data.

--overlap <uint_fast16_t>
    Size (in bins) of the overlap between processing blocks (Default 10)

-b <float>, --binsize <float>
    Bin size for processing and output image (Default 0) - Note 0 will use
    the native SPD file bin size.

-c <unsigned int>, --blockcols <unsigned int>
    Number of columns within a block (Default 0) - Note values greater
    than 1 result in a non-sequential SPD file.

-r <unsigned int>, --blockrows <unsigned int>
    Number of rows within a block (Default 100)

--, --ignore_rest
    Ignores the rest of the labeled arguments following this flag.

--version
    Displays version information and exits.

-h, --help
    Displays usage information and exits.
```

Classifies the ground returns using the multiscale curvature algorithm:
spdmccgrd

6.5.3 Parameter Free Filter – spdpffgrd

Help File

```
spdpffgrd SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
This program comes with ABSOLUTELY NO WARRANTY. This is free software,
and you are welcome to redistribute it under certain conditions; See
website (http://www.spdlib.org). Bugs are to be reported on the trac
or directly to spdlib-develop@lists.sourceforge.net
```

```
*****
WARNING!!! DO NOT USE, ALL THE BUGS HAVE NOT YET BEEN WORKED OUT!!
*****
```

USAGE:

```
spdpffgrd -o <String> -i <String> [--gdal <string>] [--class
<uint_fast16_t>] [--morphmin] [--image] [--grd <float>]
[--overlap <uint_fast16_t>] [-b <float>] [-c <unsigned int>]
[-r <unsigned int>] [--] [--version] [-h]
```

Where:

```
-o <String>, --output <String>
    (required) The output file.

-i <String>, --input <String>
    (required) The input SPD file.

--gdal <string>
    Provide the GDAL driver format (Default ENVI), Erdas Imagine is HFA,
    KEA is KEA

--class <uint_fast16_t>
    Only use points of particular class
```


`--morphmin`
Apply morphological opening and closing to remove multiple path returns (note this can remove really ground returns).

`--image`
If set an image of the output surface will be generated rather than classifying the points (useful for debugging and parameter selection)

`--grd <float>`
Threshold for deviation from identified ground surface for classifying the ground returns (Default 0.3)

`--overlap <uint_fast16_t>`
Size (in bins) of the overlap between processing blocks (Default 10)

`-b <float>, --binsize <float>`
Bin size for processing and output image (Default 0) - Note 0 will use the native SPD file bin size.

`-c <unsigned int>, --blockcols <unsigned int>`
Number of columns within a block (Default 0) - Note values greater than 1 result in a non-sequential SPD file.

`-r <unsigned int>, --blockrows <unsigned int>`
Number of rows within a block (Default 100)

`--, --ignore_rest`
Ignores the rest of the labeled arguments following this flag.

`--version`
Displays version information and exits.

`-h, --help`
Displays usage information and exits.

Classifies the ground returns using a parameter-free filtering algorithm: `spdppfgrd`

6.5.4 Polynomial Ground Filter – `spdpolygrd`

Help File

`spdpolygrd` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spdpolygrd [--iters <int>] [--degree <int>] [--grdthres <float>] [-b
<float>] [-c <unsigned int>] [-r <unsigned int>] [--]
[--version] [-h] <string> ...
```

Where:

```
--iters <int>
  Number of iterations for polynomial surface to converge on ground
  (Default = 2).
```

```
--degree <int>
  Order of polynomial surface (Default = 1).
```

```
--grdthres <float>
  Threshold for how far above the interpolated ground surface a return
  can be and be reclassified as ground (Default = 0.25).
```

```
-b <float>, --binsize <float>
  Bin size for processing and output image (Default 0) - Note 0 will use
  the native SPD file bin size.
```

```
-c <unsigned int>, --blockcols <unsigned int>
  Number of columns within a block (Default 0) - Note values greater
  than 1 result in a non-sequential SPD file.
```

```
-r <unsigned int>, --blockrows <unsigned int>
  Number of rows within a block (Default 100)
```

```

--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.

--version
  Displays version information and exits.

-h, --help
  Displays usage information and exits.

<string> (accepted multiple times)
  File names for the input files

```

Classify ground returns using a surface fitting algorithm: `spdpolygrd`

6.6 Calculate Point Cloud Metrics – `spdmetrics`

6.6.1 Help File

`spdmetrics` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```

spdmetrics {--image|--vector|--ascii} [-v <String>] -m <String> -o
  <String> -i <String> [-f <string>] [-b <float>] [-c
  <unsigned int>] [-r <unsigned int>] [--] [--version] [-h]

```

Where:

```

--image
  (OR required) Run metrics with image output
  -- OR --

```

```
--vector
  (OR required) Run metrics with vector output
  -- OR --
--ascii
  (OR required) Run metrics with ASCII output

-v <String>, --vectorfile <String>
  The input vector file.

-m <String>, --metricsxml <String>
  (required) The output SPD file.

-o <String>, --output <String>
  (required) The output file.

-i <String>, --input <String>
  (required) The input SPD file.

-f <string>, --format <string>
  Image format (GDAL driver string), Default is ENVI.

-b <float>, --binsize <float>
  Bin size for processing and output image (Default 0) - Note 0 will use
  the native SPD file bin size.

-c <unsigned int>, --blockcols <unsigned int>
  Number of columns within a block (Default 0) - Note values greater
  than 1 result in a non-sequential SPD file.

-r <unsigned int>, --blockrows <unsigned int>
  Number of rows within a block (Default 100)

--, --ignore_rest
  Ignores the rest of the labeled arguments following this flag.

--version
  Displays version information and exits.

-h, --help
  Displays usage information and exits.
```

Calculate metrics : `spdmetrics`

6.7 Generate Vertical Profiles – `spdprofile`

6.7.1 Help File

`spdprofile` SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to `spdlib-develop@lists.sourceforge.net`

USAGE:

```
spdprofile -o <String> -i <String> [-f <std::string>] [-b <float>] [-c
    <unsigned int>] [-r <unsigned int>] [-n <unsigned int>] [-t
    <unsigned int>] [-m <float>] [-w <unsigned int>] [--order
    <unsigned int>] [--smooth] [--] [--version] [-h]
```

Where:

```
-o <String>, --output <String>
    (required) The output file.

-i <String>, --input <String>
    (required) The input SPD file.

-f <std::string>, --format <std::string>
    Image format (GDAL driver string), Default is ENVI.

-b <float>, --binsize <float>
    Bin size for processing and output image (Default 0) - Note 0 will use
    the native SPD file bin size.

-c <unsigned int>, --blockcols <unsigned int>
```

Number of columns within a block (Default 0) - Note values greater than 1 result in a non-sequential SPD file.

`-r <unsigned int>, --blockrows <unsigned int>`

Number of rows within a block (Default 100)

`-n <unsigned int>, --numbins <unsigned int>`

The number of bins within the profile (Default: 20).

`-t <unsigned int>, --topheight <unsigned int>`

The highest bin of the profile (Default: 40).

`-m <float>, --minheight <float>`

The the height below which points are ignored (Default: 0).

`-w <unsigned int>, --window <unsigned int>`

The window size $((w*2)+1)$ used for the smoothing filter (Default: 3).

`--order <unsigned int>`

The order of the polynomial used to smooth the profile (Default: 3).

`--smooth`

Apply a Savitzky Golay smoothing to the profiles.

`--, --ignore_rest`

Ignores the rest of the labeled arguments following this flag.

`--version`

Displays version information and exits.

`-h, --help`

Displays usage information and exits.

Generate vertical profiles: `spdprofile`

6.8 Remove Noise – spdrmnoise

6.8.1 Help File

spdrmnoise SPDLib 3.0.0, Copyright (C) 2012 Sorted Pulse Library (SPD)
 This program comes with ABSOLUTELY NO WARRANTY. This is free software,
 and you are welcome to redistribute it under certain conditions; See
 website (<http://www.spdlib.org>). Bugs are to be reported on the trac
 or directly to spdlib-develop@lists.sourceforge.net

USAGE:

```
spdrmnoise -o <String> -i <String> [--relow <float>] [--relup <float>]
          [--abslow <float>] [--absup <float>] [-c <unsigned int>] [-r
          <unsigned int>] [--] [--version] [-h]
```

Where:

```
-o <String>, --output <String>
  (required) The output SPD file.
```

```
-i <String>, --input <String>
  (required) The input SPD file.
```

```
--relow <float>
  Relative (to median) lower threshold for returns which are to be
  removed.
```

```
--relup <float>
  Relative (to median) upper threshold for returns which are to be
  removed.
```

```
--abslow <float>
  Absolute lower threshold for returns which are to be removed.
```

```
--absup <float>
  Absolute upper threshold for returns which are to be removed.
```

```
-c <unsigned int>, --blockcols <unsigned int>
```

Number of columns within a block (Default 0) - Note values greater than 1 result in a non-sequential SPD file.

`-r <unsigned int>, --blockrows <unsigned int>`

Number of rows within a block (Default 100)

`--, --ignore_rest`

Ignores the rest of the labeled arguments following this flag.

`--version`

Displays version information and exits.

`-h, --help`

Displays usage information and exits.

Remove vertical noise from LiDAR datasets: `spdrmnoise`

Chapter 7

Other Useful Scripts

- 7.1 Generate Batch Processing Script – `spdbatchgen.py`
- 7.2 Populate a template with multiple files – `spdcmdgen.py`
- 7.3 Build a merge command – `spdbuildmergecmd.py`
- 7.4 Build extract tiles commands – `spdbuildtileextractcmd.py`

Part III

Tutorials

Chapter 8

Basic Processing

8.1 Convert to SPD

8.2 Classifying Ground Returns

Chapter 9

Large Scale Processing

9.1 Tiling Workflow

Where the primary focus is generating basic outputs primarily a DTM and maybe vegetation height over very large regions it is desirable to be able to tile datasets and run through the individual tiles simultaneously. This is particularly advantageous where a high performance computing (HPC) environment is available with a batch queue.

The following example is a workflow using SPDLib and some simple python and shell scripts on the HPC system at Auckland University, NZ, which uses the IBM loadleveler batch queue.

9.1.1 Step 1: Convert LAS files to SPD (Unindexed UPD)

The first step is to convert the LAS 1.2 files provided to SPD files, in this case they will initially be converted to unsorted data file (UPD; e.g., without a spatial index).

To do this a template (`convert2SPDTemplate.sh`) is first created with the following content:

```
spdtranslate --if LAS --of UPD -x FIRST_RETURN --input_proj \
./NZTM2000.wkt -i $FILEPATH -o $PATH/$FILENAME.spd
```

Using the `spdbatchgen.py` script the template can be used to provide a command for each input file. The output will be a single file with the command for each inputted LAS file listed.

```
spdbatchgen.py -i convert2SPDTemplate.sh -o convertLAS2SPD.sh \
-p ./Wairarapa/SPD_noIdx -d ./Wairarapa/LAS -e .las
```

The output file can be run on its own but as the HPC can run multiple jobs simultaneously we want to submit all the `spdtranslate` commands into the batch queue of the cluster.

To help with this a python script (`Submit2Loadleveler.py`) has been written which iterates through each line of an inputted text file and generates a script from each line in the input file and submits them to the cluster.

```
1  #!/usr/bin/env python
2
3  #####
4  # Copyright (c) 2013 Dr. Peter Bunting, Aberystwyth University
5  #
6  # Permission is hereby granted, free of charge, to any person obtaining a copy
7  # of this software and associated documentation files (the "Software"), to deal
8  # in the Software without restriction, including without limitation the rights
9  # to use, copy, modify, merge, publish, distribute, sublicense, and/or sell
10 # copies of the Software, and to permit persons to whom the Software is
11 # furnished to do so, subject to the following conditions:
12 # The above copyright notice and this permission notice shall be included in
13 # all copies or substantial portions of the Software.
14 #
15 # THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR
16 # IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY,
17 # FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE
18 # AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER
19 # LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,
20 # OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN
21 # THE SOFTWARE.
22 #
23 #
```



```

24 # Purpose: A class to submit jobs to loadleveler
25 # Author: Pete Bunting
26 # Email: petebunting@mac.com
27 # Date: 19/04/2013
28 # Version: 1.0
29 #
30 # History:
31 # Version 1.0 - Created.
32 #
33 #####
34
35 import os.path
36 import sys
37 from time import strftime
38 import argparse
39
40 class Submit2Loadleveler (object):
41
42     def startWithHash(self, line):
43         foundHash = False
44         for i in range(len(line)):
45             if line[i] == '#':
46                 foundHash = True
47         return foundHash
48
49     def createOutputFiles(self, inputFile, outputBase, memory, time, name):
50         inputFileList = open(inputFile, 'r')
51         outFileCount = 1
52         for eachLine in inputFileList:
53             if (eachLine.strip() != "") and (not self.startWithHash(eachLine)):
54                 outFile = open(outputBase + str("_") + str(outFileCount) + str(".ll"), 'w')
55
56                 outFile.write("#@ class = default\n")
57                 outFile.write("#@ group = nesi\n")
58                 outFile.write("#@ notification = never\n")
59                 outFile.write("#@ account_no = landcare\n")
60                 outFile.write("#@ wall_clock_limit = " + time + "\n");
61                 outFile.write("#@ resources = ConsumableMemory(" + memory + "mb) ConsumableVirtualMem
62                 outFile.write("#@ job_type = serial\n")
63                 outFile.write("#@ job_name = " + name + "_" + str(outFileCount) + str("\n"))
64                 outFile.write("#@ output = $(job_name).$(jobid).$(stepid).out\n")

```

```

65         outFile.write("#@ error = $(job_name).$(jobid).$(stepid).err\n")
66         outFile.write("#@ environment = COPY_ALL\n")
67         outFile.write("#@ queue\n\n")
68
69         outFile.write("ulimit -v " + str(int(memory)*1024) + " -m " + str(int(memory)
70
71         outFile.write(eachLine)
72
73         outFile.write("\n\n")
74
75         outFile.flush()
76         outFile.close()
77
78         command = str("llsubmit ") + outputBase + str("_") + str(outFileCount) + str(
79         print(command)
80         os.system(command)
81         outFileCount+=1
82
83
84     def run(self):
85         parser = argparse.ArgumentParser()
86         parser.add_argument("-i", "--input", dest="inputFile", type=str, help="Input list of
87         parser.add_argument("-o", "--output", dest="outputFileBase", type=str, help="Output ba
88         parser.add_argument("-m", "--memory", dest="memoryMbs", type=str, help="The amount of
89         parser.add_argument("-t", "--time", dest="timeMins", type=str, help="The time limit f
90         parser.add_argument("-n", "--name", dest="processName", type=str, help="The name of th
91
92         args = parser.parse_args()
93
94         if args.inputFile is None:
95             print("No list of commands has been inputted.")
96             parser.print_help()
97             sys.exit()
98
99         if args.outputFileBase is None:
100             print("No output base name and path has been provided.")
101             parser.print_help()
102             sys.exit()
103
104         if args.memoryMbs is None:
105             print("The memory amount must be set.")

```

```

106         parser.print_help()
107         sys.exit()
108
109     if args.timeMins is None:
110         print("The time (in minutes) must be set.")
111         parser.print_help()
112         sys.exit()
113
114     if args.processName is None:
115         print("A process name must be provided.")
116         parser.print_help()
117         sys.exit()
118
119     self.createOutputFiles(args.inputFile, args.outputFileBase, args.memoryMbs, args.timeMins, a
120
121 if __name__ == '__main__':
122     obj = Submit2Loadleveler()
123     obj.run()

```

Using this new script the following command can be run to submit the jobs to the queue.

```
python Submit2Loadleveler.py -i convertLAS2SPD.sh -o Convert2SPDFFromLAS \
-m 1000 -t 50:00 -n Convert2LAS
```

Following execution on the HPC console and error files are generated, error files have a size of zero no errors have been produced. Therefore, using a shell script (rmZeroErrOutFiles.sh) delete the error and console files where the error files have a size of zero. This makes identifying potential errors much easier.

```

1  # Created by Pete Bunting (petebunting@mac.com)
2  #
3  # A simple script to delete the error and output files
4  # of if the error file has a file of zero (i.e., there
5  #were no errors).
6  #
7  # These files a generally produced from a HPC systems.
8  #
9
10 # Inputs:
11 # £1 is the base path

```

```

12
13 FILES=$1*.err
14 for f in $FILES
15 do
16     echo "Processing $f file..."
17     FILESIZE=$(stat -c%s "$f")
18     echo $FILESIZE
19     if [ "$FILESIZE" = 0 ] ; then
20         # code
21         fileBase='basename ${f} .err'
22         rm "${fileBase}.out"
23         rm $f
24     fi
25 done

```

Execute the script as follows:

```
sh ./rmZeroErrOutFiles.sh ./Convert2LAS_
```

9.1.2 Step 2: Define Individual Tiles

The next step is to generate a set of overlapping tiles, on which the processing will be carried out and the results merged. The overlap allows the final results to be seamlessly mosaiced after processing.

SPDLib provides two commands which need to be used to tile the data `spddefiles` and `spdtiling`.

The first step is to create a text file which lists all the input (SPD) files which will be used as an input during these processing steps.

Again writing a python script (`ListDIR2text.py`) to perform this task is useful and is shown below.

```

1  #!/usr/bin/env python
2
3  #####
4  # A script to list files with a specific
5  # extention within directory
6  #

```

```
7 # Author: Pete Bunting
8 # Email: petebunting@mac.com
9 # Date: 24/04/2013
10 # Version: 1.0
11 #####
12
13 import os.path
14 import sys
15 import argparse
16
17 class ListFile2Text (object):
18
19     def checkFileExtension(self, filename, extension):
20         foundExtension = False;
21         filenamesplit = os.path.splitext(filename)
22         fileExtension = filenamesplit[1].strip()
23         if(fileExtension == extension):
24             foundExtension = True
25         return foundExtension
26
27     def findFiles(self, fileList, directory, extension):
28         if os.path.exists(directory):
29             if os.path.isdir(directory):
30                 fileList = os.listdir(directory)
31                 for filename in fileList:
32                     if(os.path.isdir(os.path.join(directory,filename))):
33                         self.findFiles(fileList, os.path.join(directory,filename), extension)
34                     elif(os.path.isfile(os.path.join(directory,filename))):
35                         if(self.checkFileExtension(filename, extension)):
36                             fileList.append(os.path.join(directory,filename))
37                 else:
38                     print(filename + ' is NOT a file or directory!')
39             else:
40                 print(directory + ' is not a directory!')
41         else:
42             print(directory + ' does not exist!')
43
44     def run(self, dir, ext, output):
45         fileList = list()
46         self.findFiles(fileList, dir, ext)
47
```

```

48     outFile = open(output, 'w')
49     for file in filelist:
50         outFile.write(file)
51         outFile.write('\n')
52     outFile.close()
53
54
55 if __name__ == '__main__':
56     # Create the command line options parser.
57     parser = argparse.ArgumentParser()
58     parser.add_argument("-d", "--dir", type=str, help="The directory within which the files are")
59     parser.add_argument("-e", "--ext", type=str, help="File extension of the files of interest")
60     parser.add_argument("-o", "--output", type=str, help="Output text file.")
61     # Call the parser to parse the arguments.
62     args = parser.parse_args()
63
64     if args.dir == None:
65         # Print an error message if not and exit.
66         print("Error: No dir option provided.")
67         sys.exit()
68     if args.ext == None:
69         # Print an error message if not and exit.
70         print("Error: No ext option provided.")
71         sys.exit()
72     if args.output == None:
73         # Print an error message if not and exit.
74         print("Error: No output option provided.")
75         sys.exit()
76
77
78
79     obj = ListFile2Text()
80     obj.run(args.dir, args.ext, args.output)

```

Using the scrip the following command can be executed to generate the list of files.

```
python ListDIR2text.py -d ./Wairarapa/SPD_noIdx -e .spd -o OriginalSPDFiles.lst
```

To generate a tiling the region over which the tiles are to be generated first needs defining. The `spdeftiles` command has a useful tool for helping to define this by

calculating the extent of all the input files, as show below.

```
spddefiles --extent --input ./OriginalSPDFiles.lst
```

When running this command any SPD files outputted from step 1 which contain errors (i.e., cannot be opened) will also be found and provides a useful level of checking. Therefore, if any errors are produced when opening the individual files go back to step 1 and fix the cause of the error (e.g., didn't allow enough time or memory?).

Using the extent provided by the previous command use `spddefiles` to define the individual tiles within a XML file. The command is shown below:

```
spddefiles --tiles --output ./WairarapaTiles.xml --xmin 1812600 \
--xmax 1828600 --ymin 5466000 --ymax 5485600 --overlap 200 \
--ysize 2000 --xsize 2000
```

The result is an XML file with the following basic structure:

```
1 <tiles columns="int" overlap="double" rows="int" xmax="double"
2     xmin="double" xtilesize="double" ymax="double" ymin="double"
3     ytilesize="double">
4
5     <tile col="int" corexmax="double" corexmin="double" coreymax="double"
6         coreymin="double" file="string" row="int" xmax="double"
7         xmin="double" ymax="double" ymin="double"/>
8
9     <tile col="int" corexmax="double" corexmin="double" coreymax="double"
10        coreymin="double" file="string" row="int" xmax="double"
11        xmin="double" ymax="double" ymin="double"/>
12
13    <tile col="int" corexmax="double" corexmin="double" coreymax="double"
14        coreymin="double" file="string" row="int" xmax="double"
15        xmin="double" ymax="double" ymin="double"/>
16 </tiles>
```

9.1.3 Step 4: Extract Individual Tiles

To extract the individual tiles from the whole dataset two options are available on the `spdtiling` command. The first (`-all`) is a single threaded operation which

in one command extracts all the tiles but this can take quite a long time and do not use the HPC to its full potential. Therefore, the `--extract` option is used which just extracts a single tile but by submitting a copy of this command to the HPC batch queue then all the tiles can be generated simultaneously and therefore much more quickly.

The `extract` command is the following, where `XX` is the row and column to be extracted.

```
spdtiling --extract --deltiles --col XX --row XX \  
--input ./OriginalSPDFiles.lst --tiles ./WairarapaTiles.xml \  
--output ./Wairarapa/SPDTiles/WairarapaTile
```

A python script (`spdbuildtileextractcmd.py`) to generate these commands has been provided as part of `SPDLib` and can be used as follows:

```
spdbuildtileextractcmd.py --filelist ./OriginalSPDFiles.lst \  
--tiles ./WairarapaTiles.xml --outputbase ./Wairarapa/SPDTiles/WairarapaTile \  
-o ./ExtractTilesCmds.txt --deltile
```

To submit these commands to the batch queue reuse the `Submit2Loadleveler.py` script as shown below:

```
python Submit2Loadleveler.py -i ./ExtractTilesCmds.txt \  
-o ExtractSPDTile -m 2000 -t 50:00 -n ExtractTile
```

Once they have all completed check that the error files are all zero (use `rmZeroErrOutFiles.sh`) but also that they all completed which can be done by checking the last line of the console output which should be `'spdtiling - end'`. The `tail` command can be used for this, as shown below:

```
tail -n 1 ./ExtractTile_*.out
```

9.1.4 Step 4: Generate a Clump Image

To visual the location of the tiles and for later error checking it is also useful to create a clumps image of the tiling.

```
spdtileimg --clump --tiles ./WairarapaTiles.xml \  
--output ./WairarapaTileClumps.keg --format KEA -r 10 \  
--wkt NZTM2000.wkt
```


Once generated use the `gdalcalcstats` command to add a colour table and pyramids.

```
gdalcalcstats WairarapaTileClumps.kea -ignore 0
```

9.1.5 Step 5: Process Each Tile

To process each tile the `spdbatchgen.py` script is again used where the script will be used to generate an output script for each input file (i.e., tile). Therefore, the template needs to also include the header information for the HPC system (in this case `loadleveler`) and this is shown at the top of the template below.

The template is undertaking the following processing:

1. Index tile onto a 10 m grid creating an SPD file.
2. Classify the ground returns using the PMF algorithm.
3. Define the height field within the SPD file using the ground returns.
4. Interpolate a DTM from the ground returns.
5. Interpolate a CHM from using the height field.
6. Finally, tidy up tiles with are no longer required.

```

1  #@ class = default
2  #@ group = nesi
3  #@ notification = never
4  #@ account_no = [ENTER ACCOUNT NUMBER HERE]
5  #@ wall_clock_limit = 180:00
6  #@ resources = ConsumableMemory(8000mb) ConsumableVirtualMemory(8000mb)
7  #@ job_type = serial
8  #@ job_name = $FILENAME_LiDARProcess
9  #@ output = $(job_name).$(jobid).$(stepid).out
10 #@ error = $(job_name).$(jobid).$(stepid).err
11 #@ environment = COPY_ALL
12 #@ queue
13
14 ulimit -v 8192000 -m 8192000
15
16 mkdir $PATH/tmp/$FILENAME

```

```

17
18 spdtranslate --if SPD --of SPD --temppath $PATH/tmp/$FILENAME/$FILENAME_TmpTile \
19 --usetmp --numofrows 25 -b 10 -x FIRST_RETURN -i $FILEPATH \
20 -o $PATH/SPD/$FILENAME_10m.spd
21
22 spdpmfgrd -c 50 -r 50 -b 1 -i $PATH/SPD/$FILENAME_10m.spd \
23 -o $PATH/SPD/$FILENAME_10m_pmfgrd.spd
24
25 spddefheight --interp -c 50 -r 50 --in NATURAL_NEIGHBOR \
26 -i $PATH/SPD/$FILENAME_10m_pmfgrd.spd -o $PATH/SPD/$FILENAME_10m_pmfgrd_h.spd
27
28 spdinterp --dtm --topo --in NATURAL_NEIGHBOR -f KEA -b 2 -c 50 -r 50 \
29 --overlap 5 -i $PATH/SPD/$FILENAME_10m_pmfgrd_h.spd \
30 -o $PATH/DTM/$FILENAME_1m_pmfgrd_dtm.kea
31
32 spdinterp --dsm --height --in NATURAL_NEIGHBOR -f KEA -b 2 -c 50 -r 50 \
33 --overlap 5 -i $PATH/SPD/$FILENAME_10m_pmfgrd_h.spd \
34 -o $PATH/CHM/$FILENAME_1m_pmfgrd_chm.kea
35
36 rm $PATH/SPD/$FILENAME_10m_pmfgrd.spd
37 rm $PATH/SPD/$FILENAME_10m.spd
38 rm -Rf $PATH/tmp/$FILENAME

```

To generate the scripts for the individual tiles using the template the `spdbatchgen.py` script is used as follows:

```

spdbatchgen.py -i WellingtonJobTemplate.sh -o WellingtonProcessing \
-d ./Wairarapa/SPDTiles -e .spd -p ./Wairarapa --output_type multiple \
--recurse no

```

The script also builds a shell script (`*_runall.sh`) which can be used on a single threaded machine to run all the jobs sequentially but as we are using on the HPC this file should be removed.

```
rm WellingtonProcessing_runall.sh
```

To submit the jobs to the HPC batch queue it is again convenient define a shell script for these, as shown below.

```

FILES=WellingtonProcessingWairarapaTile*.sh
for f in $FILES
do

```

```
echo "Submitting $f to the queue..."
llsubmit $f
```

These three steps can also be put together into a single shell script which simplifies the processing further so it is recommend that a script (submitTilesForProcessing.sh) is created, as shown below.

```
spdbatchgen.py -i WellingtonJobTemplate.sh -o WellingtonProcessing \
-d ./Wairarapa/SPDTiles -e .spd -p ./Wairarapa --output_type multiple \
--recurse no
```

```
rm WellingtonProcessing_runall.sh
```

```
FILES=WellingtonProcessingWairarapaTile*.sh
for f in $FILES
do
  echo "Submitting $f to the queue..."
  llsubmit $f
```

All the tiles can therefore be executed with the following command.

```
sh submitTilesForProcessing.sh
```

9.1.6 Step 6: Check Outputs are Consitant

The next step is to make sure all the tiles ran through OK, which first of all can be done with checking the error output files but also that the number and size of the output files are as expected.

Use the du command to check the directory sizes make sense (i.e., the SPD folder is a similar size to SPDTiles) and count the tiles to make sure all are present. The commands are shown below:

```
du -h
ls -l SPDTiles | wc -l
ls -l SPD | wc -l
ls -l CHM | wc -l
ls -l DTM | wc -l
```

9.1.7 Step 7: Mosaic Image Outputs

To mosaic the results create lists of the output image tiles (DTM and CHM folders) using the ListDIR2text.py script.

```
python ListDIR2text.py -d ./Wairarapa/CHM -e .kea -o CHMTiles.lst
python ListDIR2text.py -d ./Wairarapa/DTM -e .kea -o DTMTiles.lst
```

The spdtileimg command can then be used to mosaic the result back together.

CHM:

```
spdtileimg --mosaic --format KEA --input ./CHMTiles.lst \
--tiles ./WairarapaTiles.xml --output ./Wairarapa/Wairarapa_CHM.kea

gdalcalcstats Wairarapa_CHM.kea -ignore 0
```

DTM:

```
spdtileimg --mosaic --format KEA --input ./DTMTiles.lst \
--tiles ./WairarapaTiles.xml --output ./Wairarapa/Wairarapa_DTM.kea

gdalcalcstats Wairarapa_DTM.kea -ignore 0
```

You may also want to create a hillshade image from the DTM and this can be done using the gdaldem tool:

```
gdaldem hillshade -of KEA Wairarapa_DTM.kea Wairarapa_DTM_HS.kea

gdalcalcstats Wairarapa_DTM_HS.kea
```

Part IV

Development

Bibliography

Bater, C. W., Coops, N. C., 2009. Evaluating error associated with lidar-derived DEM interpolation. *Computers and Geosciences* 35 (2), pp. 289–300.

The CGAL Project, 2012. CGAL User and Reference Manual, 4.1 Edition. CGAL Editorial Board, http://www.cgal.org/Manual/4.1/doc.html/cgal_manual/packages.html.

Zhang, K., Chen, S., Whitman, D., Shyu, M., Yan, J., Zhang, C., 2003. A progressive morphological filter for removing nonground measurements from airborne LIDAR data. *IEEE Transactions on Geoscience and Remote Sensing* 41 (4), pp. 872–882.